



Rubber Europe

Quality rubber solutions inside.

Mining Brochure

## A brief introduction


### ***About Zenith Rubber Europe***

*Zenith Rubber Europe is a Dutch based supplier of high quality rubber products since 2010. The large stock of rubber sheets and matting in different qualities and sizes enables us to supply different industries throughout Europe. We aim to provide our customers an excellent solution by our well-trained staff, own laboratory and prompt order processing. In case you can not find your rubber product within our standard range, please contact us to help you find a customized solution.*

### ***About Zenith Industrial Rubber Products Pvt. Ltd.***

*Zenith Industrial Rubber Products Pvt. Ltd. is an industrial rubber products manufacturing company based in Mumbai, India. Founded in 1965, Zenith is now one of the major exporters of quality rubber solutions globally. More than 90% of the goods are exported over five continents in the world. Europe has grown to be the largest market for Zenith since several years.*

T +31 (0)88 618 93 40  
info@zenitheurope.com

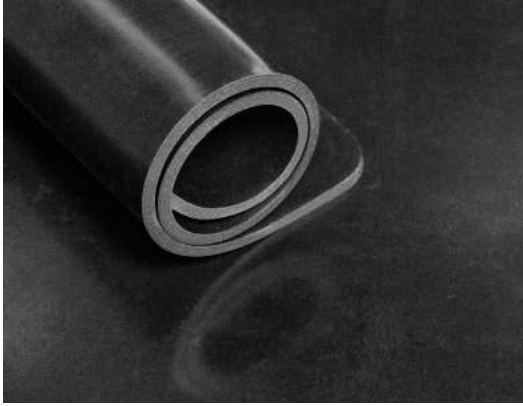

## Mining & Para Centaur Black

<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,17 grs/cm <sup>3</sup>
<b>Hardness:</b>	60 Shore A +/- 5
<b>Tensile strength:</b>	13 Mpa
<b>Elongation at break:</b>	450%
<b>Abrasion:</b>	120 mm <sup>3</sup>

**Features:** Good resistance to abrasion with high tensile strength, elasticity and excellent adhesion.

**Application:** Widely used in rubber lining for material handling equipment or any other crucial application to reduce wear and tear.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,4/2	10	AB60117 3/0
4	1,4/2	10	AB60117 4/0
5	1,4/2	10	AB60117 5/0
6	1,4/2	10	AB60117 6/0
8	1,4/2	10	AB60117 8/0
10	1,4/2	10	AB60117 10/0
12	1,4/2	10	AB60117 12/0
15	1,4/2	10	AB60117 15/0
20	1,4/2	10	AB60117 20/0
25	1,4/2	10	AB60117 25/0
30	1,4/2	10	AB60117 30/0
40	2	5	AB60117 40/0
50	2	5	AB60117 50/0




## Mining & Para Centaur Black BL

<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,17 grs/cm <sup>3</sup>
<b>Hardness:</b>	60 Shore A +/- 5
<b>Tensile strength:</b>	13 Mpa
<b>Elongation at break:</b>	450%
<b>Abrasion:</b>	120 mm <sup>3</sup>

**Features:** Good resistance to abrasion with high tensile strength, elasticity and excellent adhesion, with bonding layer.

**Application:** Widely used in rubber lining for material handling equipment or any other crucial application to reduce wear and tear.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,4	10	AB60117B 3/0
4	1,4	10	AB60117B 4/0
5	1,4	10	AB60117B 5/0
6	1,4/2	10	AB60117B 6/0
8	1,4/2	10	AB60117B 8/0
10	1,4/2	10	AB60117B 10/0
12	2	10	AB60117B 12/0
15	1,4/2	10	AB60117B 15/0
20	1,4/2	10	AB60117B 20/0
25	2	10	AB60117B 25/0
30	2	10	AB60117B 30/0

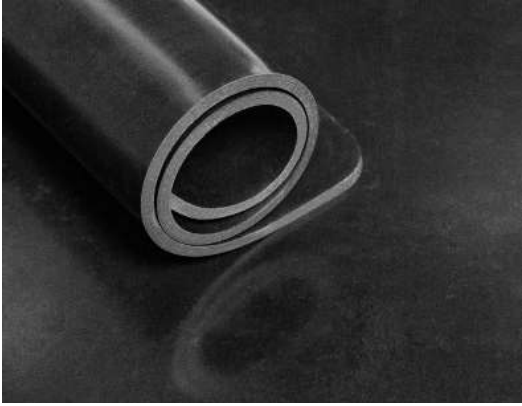


## Mining & Para Side Skirt Black

**Colour:** Black  
**Temperature range:** -30° to +70°C  
**Specific gravity:** 1,2 grs/cm<sup>3</sup>  
**Hardness:** 60 Shore A +/- 5  
**Tensile strength:** 8 Mpa  
**Elongation at break:** 300%

**Features:** Good resistance to abrasion with high tensile strength, elasticity and excellent adhesion.

**Application:** Widely used in rubber lining for reducing spillage, and damage to the conveyor belt.

Thickness (mm)	Width (mm)	Length (mtr)	Article nr.
8	80	20	S60 8/0-80
8	100	20	S60 8/0-100
8	120	20	S60 8/0-120
8	150	20	S60 8/0-150
8	200	20	S60 8/0-200
8	250	20	S60 8/0-250
8	300	20	S60 8/0-300
10	80	20	S60 10/0-80
10	100	20	S60 10/0-100
10	120	20	S60 10/0-120
10	150	20	S60 10/0-150
10	200	20	S60 10/0-200
10	250	20	S60 10/0-250
10	300	20	S60 10/0-300

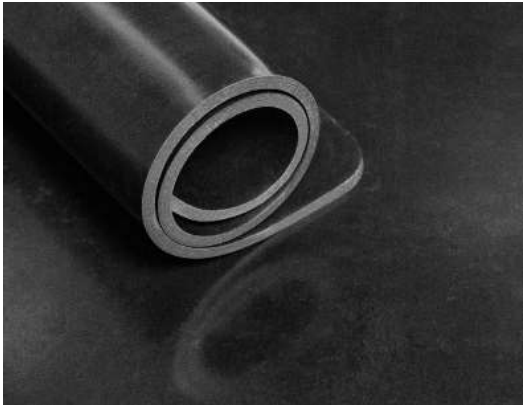


## Mining & Para Centaur Black 40

**Colour:** Black  
**Temperature range:** -30° to +70°C  
**Specific gravity:** 1,10 grs/cm<sup>3</sup>  
**Hardness:** 40 Shore A +/- 5  
**Tensile strength:** 17 Mpa  
**Elongation at break:** 600%  
**Abrasion:** 120 mm<sup>3</sup>

**Features:** Good resistance to abrasion with high tensile strength and elasticity.

**Application:** Widely used in shot blasting industry, rubber lining for material handling equipment or any other crucial application to reduce wear and tear.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
4	1,4	10	AB40110 4/0
5	1,4	10	AB40110 5/0
6	1,4	10	AB40110 6/0
8	1,4	10	AB40110 8/0
10	1,4	10	AB40110 10/0
15	1,4	10	AB40110 15/0
20	1,4	10	AB40110 20/0

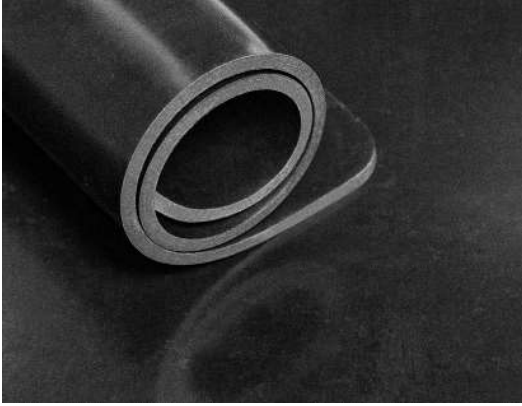

## Mining & Para Centaur NBR

**Quality:** NBR  
**Colour:** Black  
**Temperature range:** -25° to +80°C  
**Specific gravity:** 1,35 grs/cm<sup>3</sup>  
**Hardness:** 60 Shore A +/- 5  
**Tensile strength:** 6 Mpa  
**Elongation at break:** 250%  
**Abrasion:** 220 mm<sup>3</sup>

**Features:** Good resistance to oil and abrasion with high tensile strength and elasticity.

**Application:** Widely used in rubber lining for material handling equipment or any other crucial application to reduce wear and tear.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
8	2	10	NB60135 8/0
10	2	10	NB60135 10/0



## Mining & Para Centaur NBR BL

**Quality:** NBR  
**Colour:** Black  
**Temperature range:** -25° to +80°C  
**Specific gravity:** 1,35 grs/cm<sup>3</sup>  
**Hardness:** 60 Shore A +/- 5  
**Tensile strength:** 6 Mpa  
**Elongation at break:** 250%  
**Abrasion:** 220 mm<sup>3</sup>

**Features:** Good resistance to oil and abrasion with high tensile strength and elasticity, with bonding layer.

**Application:** Widely used in rubber lining for material handling equipment or any other crucial application to reduce wear and tear.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
8	2	10	NB60135B 8/0
10	2	10	NB60135B 10/0









## Mining & Para

### Centaur Red

<b>Colour:</b>	Red
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	45 Shore A +/- 5
<b>Tensile strength:</b>	15 Mpa
<b>Elongation at break:</b>	600%
<b>Abrasion:</b>	100 mm <sup>3</sup>

**Features:** Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion

**Application:** Very wide range of applications, conveyor systems, pumps et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	AB45110R 1/0
1,5	1,4	15	AB45110R 1,5/0
2	1,4	10	AB45110R 2/0
3	1,4/2	10	AB45110R 3/0
4	1,4/2	10	AB45110R 4/0
5	1,4/2	10	AB45110R 5/0
6	1,4/2	10	AB45110R 6/0
8	1,4/2	10	AB45110R 8/0
10	1,4/2	10	AB45110R 10/0
12	2	10	AB45110R 12/0
15	1,4/2	10	AB45110R 15/0
20	1,4/2	10	AB45110R 20/0
25	2	10	AB45110R 25/0



## Mining & Para

### Centaur Red BL

<b>Colour:</b>	Red
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	45 Shore A +/- 5
<b>Tensile strength:</b>	15 Mpa
<b>Elongation at break:</b>	600%
<b>Abrasion:</b>	100 mm <sup>3</sup>

**Features:** Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion with bonding layer.

**Application:** Very wide range of applications, conveyor systems, pumps, chutes et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	2	10	AB45110RB 3/0
4	2	10	AB45110RB 4/0
5	2	10	AB45110RB 5/0
6	1,4/2	10	AB45110RB 6/0
8	1,4/2	10	AB45110RB 8/0
10	1,4/2	10	AB45110RB 10/0
12	2	10	AB45110RB 12/0
15	2	10	AB45110RB 15/0
20	2	10	AB45110RB 20/0
25	2	10	AB45110RB 25/0



## Mining & Para Centaur Red Eco

<b>Colour:</b>	Red
<b>Temperature range:</b>	-40° to +70°C
<b>Specific gravity:</b>	1,20 grs/cm <sup>3</sup>
<b>Hardness:</b>	45 Shore A +/- 5
<b>Tensile strength:</b>	12 Mpa
<b>Elongation at break:</b>	500%
<b>Abrasion:</b>	150 mm <sup>3</sup>

**Features:** Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion.

**Application:** Very wide range of applications, conveyor systems, pumps et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	2	10	ABE45120R 3/0
4	2	10	ABE45120R 4/0
5	2	10	ABE45120R 5/0
6	2	10	ABE45120R 6/0
8	2	10	ABE45120R 8/0
10	2	10	ABE45120R 10/0
15	2	10	ABE45120R 15/0
20	2	10	ABE45120R 20/0



## Mining & Para Side Skirt Red

**Colour:** Red  
**Temperature range:** -40° to +70°C  
**Specific gravity:** 1,20 grs/cm<sup>3</sup>  
**Hardness:** 45 Shore A +/- 5  
**Tensile strength:** 12 Mpa  
**Elongation at break:** 500%

**Features:** Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion.

**Application:** Widely used in rubber lining for reducing spillage, and damage to the conveyor belt.

Thickness (mm)	Width (mm)	Length (mtr)	Article nr.
8	80	20	S45 8/0-80
8	100	20	S45 8/0-100
8	120	20	S45 8/0-120
8	150	20	S45 8/0-150
8	200	20	S45 8/0-200
8	250	20	S45 8/0-250
8	300	20	S45 8/0-300
10	80	20	S45 10/0-80
10	100	20	S45 10/0-100
10	120	20	S45 10/0-120
10	150	20	S45 10/0-150
10	200	20	S45 10/0-200
10	250	20	S45 10/0-250
10	300	20	S45 10/0-300





Arbon

ZE





## Mining & Para Centaur Orange

<b>Colour:</b>	Orange
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	50 Shore A +/- 5
<b>Tensile strength:</b>	15 Mpa
<b>Elongation at break:</b>	600%
<b>Abrasion:</b>	100 mm <sup>3</sup>

**Features:** Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion.

**Application:** Very wide range of applications, conveyor systems, pumps, chutes.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
6	2	10	AB50110 6/0
8	2	10	AB50110 8/0
10	2	10	AB50110 10/0



## Mining & Para Centaur Orange BL

<b>Colour:</b>	Orange
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	50 Shore A +/- 5
<b>Tensile strength:</b>	15 Mpa
<b>Elongation at break:</b>	600%
<b>Abrasion:</b>	100 mm <sup>3</sup>

**Features:** Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion with bonding layer

**Application:** Very wide range of applications, conveyor systems, pumps, chutes.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
6	2	10	AB50110B 6/0
8	2	10	AB50110 B 8/0
10	2	10	AB50110B 10/0



## Mining & Para Side Skirt Orange

**Colour:** Orange  
**Temperature range:** -30° to +70°C  
**Specific gravity:** 1,15 grs/cm<sup>3</sup>  
**Hardness:** 50 Shore A +/- 5  
**Tensile strength:** 13 Mpa  
**Elongation at break:** 500%

**Features:** Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion.

**Application:** Widely used in rubber lining for reducing spillage, and damage to the conveyor belt.

Thickness (mm)	Width (mm)	Length (mtr)	Article nr.
10	80	20	S50 10/0-80
10	100	20	S50 10/0-100
10	120	20	S50 10/0-120
10	150	20	S50 10/0-150
10	200	20	S50 10/0-200
10	250	20	S50 10/0-250
10	300	20	S50 10/0-300



## Mining & Para Pulley Lagging Mini Diamond BL

<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,17 grs/cm <sup>3</sup>
<b>Hardness:</b>	60 Shore A +/- 5
<b>Tensile strength:</b>	13 Mpa
<b>Elongation at break:</b>	450%
<b>Abrasion:</b>	120 mm <sup>3</sup>

**Features:** Good resistance to abrasion with a diamond shaped anti slip profile and bonding layer. Produced on rotocure.

**Application:** To reduce belt slippage, wear of the drum and conveyor belt.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
6,6	1,5/2	10	PL60117B 6/0
8	1,5/2	10	PL60117B 8/0
10	1,5/2	10	PL60117B 10/0
12	2	10	PL60117B 12/0
15	2	10	PL60117B 15/0



## Mining & Para Pulley Lagging Square Diamond BL

<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,17 grs/cm <sup>3</sup>
<b>Hardness:</b>	60 Shore A +/- 5
<b>Tensile strength:</b>	13 Mpa
<b>Elongation at break:</b>	450%
<b>Abrasion:</b>	120 mm <sup>3</sup>

**Features:** Good resistance to abrasion with a square shaped anti slip profile and bonding layer. Usable in two directions.

**Application:** To reduce belt slippage, wear of the drum and conveyor belt.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
8	1,5	10	PL60117BSD 8/0
10	1,5	10	PL60117BSD 10/0
12	1,5	10	PL60117BSD 12/0





## Mining & Para

### Pulley Lagging Big Diamond BL

**Colour:** Black  
**Temperature range:** -30° to +70°C  
**Specific gravity:** 1,17 grs/cm<sup>3</sup>  
**Hardness:** 60 Shore A +/- 5  
**Tensile strength:** 13 Mpa  
**Elongation at break:** 450%  
**Abrasion:** 120 mm<sup>3</sup>

**Features:** Good resistance to abrasion with a big diamond shaped anti slip profile and bonding layer.

**Application:** To reduce belt slippage, wear of the drum and conveyor belt. For heavy duty installations.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
12	2	10	PL60117BBD 12/0
15	2	10	PL60117BBD 15/0



## Mining & Para

### Pulley Lagging NBR BL

**Quality:** NBR/NR  
**Colour:** Black  
**Temperature range:** -25° to +80°C  
**Specific gravity:** 1,35 grs/cm<sup>3</sup>  
**Hardness:** 60 Shore A +/- 5  
**Tensile strength:** 6 Mpa  
**Elongation at break:** 250%  
**Abrasion:** 220 mm<sup>3</sup>

**Features:** Good oil and abrasion resistant drum lagging with a diamond shaped anti slip profile and bonding layer. Produced on rotocure.

**Application:** To reduce belt slippage, wear of the drum and conveyor belt.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
8	2	10	PL60135NB 8/0
10	2	10	PL60135NB 10/0



## Mining & Para Pulley Lagging NBR Food Grade BL

<b>Quality:</b>	NBR
<b>Colour:</b>	Off white
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	55 Shore A +/- 5
<b>Tensile strength:</b>	15 Mpa
<b>Elongation at break:</b>	600%
<b>Abrasion:</b>	120 mm <sup>3</sup>
<b>Certification:</b>	FDA and EC1935

**Features:** Food grade drum lagging with good resistance to abrasion, a diamond shaped anti slip profile and bonding layer. Oil and Grease resistant.

**Application:** To reduce belt slippage, wear of the drum and conveyor belt in the food industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
6,6	2	10	PL55110BW 6,6/0
8	2	10	PL55110BW 8/0
10	2	10	PL55110BW 10/0



## Mining & Para Pulley Lagging Food Grade BL

<b>Colour:</b>	Blue
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	55 Shore A +/- 5
<b>Tensile strength:</b>	15 Mpa
<b>Elongation at break:</b>	600%
<b>Abrasion:</b>	120 mm <sup>3</sup>
<b>Certification:</b>	FDA and EC1935

**Features:** Food grade drum lagging with good resistance to abrasion, a diamond shaped anti slip profile and bonding layer.

**Application:** To reduce belt slippage, wear of the drum and conveyor belt in the food industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
6,6	2	10	PL55110B 6,6/0
8	2	10	PL55110B 8/0
10	2	10	PL55110B 10/0



## Mining & Para Pulley Lagging BL Red

<b>Colour:</b>	Red
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	45 Shore A +/- 5
<b>Tensile strength:</b>	15 Mpa
<b>Elongation at break:</b>	600%
<b>Abrasion:</b>	100 mm <sup>3</sup>

**Features:** Good resistance to abrasion with a diamond shaped anti slip profile and bonding layer.

**Application:** To reduce belt slippage, wear of the drum and conveyor belt.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
6,6	2	10	PL45110B 6,6/0
8	2	10	PL45110B 8/0
10	2	10	PL45110B 10/0



## Mining & Para Ceramic Pulley Lagging BL

<b>Colour:</b>	Black
<b>Temperature range:</b>	-40° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	70 Shore A +/- 5
<b>Tensile strength:</b>	17 Mpa
<b>Elongation at break:</b>	450%
<b>Abrasion:</b>	100 mm <sup>3</sup>

**Features:** Ceramic equipped drum lagging with excellent abrasion resistance and bonding layer.

**Application:** Protective surface to improve and extend pulley life in applications for extreme conditions in wet and muddy areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
12	0,5	10	PLC70110 12/0
15	0,5	10	PLC70110 15/0



## Mining & Para Red Dragon

<b>Colour:</b>	Red
<b>Finish:</b>	One side smooth other side fabric finish
<b>Temperature range:</b>	-40° to +75°C
<b>Specific gravity:</b>	0,98 grs/cm <sup>3</sup>
<b>Hardness:</b>	38 Shore A +/- 5
<b>Tensile strength:</b>	25 Mpa
<b>Elongation at break:</b>	900%
<b>Abrasion:</b>	80 mm <sup>3</sup>

**Features:** Premium resistance to abrasion with excellent tensile strength and high elasticity.

**Application:** Lining of slurry chutes, wear protection, conveyer systems and shooting ranges.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	Abrasuper40 2/0
3	1,4	10	Abrasuper40 3/0
4	1,4	10	Abrasuper40 4/0
5	1,4	10	Abrasuper40 5/0
6	1,4	10	Abrasuper40 6/0
8	1,4	5	Abrasuper40 8/0
10	1,4	5	Abrasuper40 10/0





## Mining & Para Red Dragon Eco

**Colour:** Red  
**Temperature range:** -25° to +70°C  
**Specific gravity:** 0,98 grs/cm<sup>3</sup>  
**Hardness:** 35 Shore A +/- 5  
**Tensile strength:** 20 Mpa  
**Elongation at break:** 650%  
**Abrasion:** 88 mm<sup>3</sup>

**Features:** Premium resistance to abrasion with excellent tensile strength and high elasticity.

**Application:** Lining of slurry chutes, wear protection, conveyer systems and shooting ranges.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	2	10	AB35100R 3/0
6	2	10	AB35100R 6/0
10	2	10	AB35100R 10/0
15	2	10	AB35100R 15/0
20	2	10	AB35100R 20/0



## Mining & Para Red Dragon Eco BL

**Colour:** Red  
**Temperature range:** -25° to +70°C  
**Specific gravity:** 0,98 grs/cm<sup>3</sup>  
**Hardness:** 35 Shore A +/- 5  
**Tensile strength:** 20 Mpa  
**Elongation at break:** 650%  
**Abrasion:** 88 mm<sup>3</sup>

**Features:** Premium resistance to abrasion with excellent tensile strength and high elasticity, with bonding layer.

**Application:** Lining of slurry chutes, wear protection, conveyer systems and shooting ranges.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	2	10	AB35100RB 3/0
6	2	10	AB35100RB 6/0
10	2	10	AB35100RB 10/0
15	2	10	AB35100RB 15/0
20	2	10	AB35100RB 20/0



## Mining & Para White Dragoon

**Colour:** Off White  
**Finish:** One side smooth other side fabric finish  
**Temperature range:** -40° to +75°C  
**Specific gravity:** 1,10 grs/cm<sup>3</sup>  
**Hardness:** 40 Shore A +/- 5  
**Tensile strength:** 22 Mpa  
**Elongation at break:** 700%  
**Abrasion:** 120 mm<sup>3</sup>

**Features:** Premium resistance to abrasion with excellent tensile strength and high elasticity. Food quality according to FDA and EC1935/2004.

**Application:** Food processing, pharmaceutical and cosmetic Industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,4	10	AbrasuperFG 3/0
5	1,4	10	AbrasuperFG 5/0
6	1,4	10	AbrasuperFG 6/0
8	1,4	10	AbrasuperFG 8/0
10	1,4	10	AbrasuperFG 10/0



## Mining & Para Orange Dragoon

**Quality:** NBR  
**Colour:** Orange  
**Temperature range:** -30° to +75°C  
**Specific gravity:** 1,10 grs/cm<sup>3</sup>  
**Hardness:** 55 Shore A +/- 5  
**Tensile strength:** 13 Mpa  
**Elongation at break:** 700%  
**Abrasion:** 160 mm<sup>3</sup>

**Features:** Premium resistance to abrasion with excellent tensile strength and high elasticity.

**Application:** Lining of slurry chutes, wear protection and conveyer systems where oil-based reagents are used.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,4	10	Abratrile 3/0
5	1,4	10	Abratrile 5/0
6	1,4	10	Abratrile 6/0
8	1,4	10	Abratrile 8/0
10	1,4	10	Abratrile 10/0



## Mining & Para Typhon Dustsealing

**Colour:** Black  
**Temperature range:** -25° to +70°C  
**Specific gravity:** 0,98 grs/cm<sup>3</sup>  
**Hardness:** 40 Shore A +/- 5  
**Tensile strength:** 20 Mpa  
**Elongation at break:** 650%  
**Abrasion:** 90 mm<sup>3</sup>

**Features:** A black soft NR sheet with both sides fabric finish.

**Application:** Used as dustsealing.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1,5	1,4	20	AB40100SP 1,5/0
2	1,4	20	AB40100SP 2/0
3	1,4	20	AB40100SP 3/0



## Mining & Para Triton Sandwich

**Colour:** Black/Red/Black or Black/Green/Black  
**Temperature range:** -40° to +70°C  
**Specific gravity:** 1,15 grs/cm<sup>3</sup>  
**Hardness:** 60/45/60 Shore A +/- 5  
**Tensile strength:** 15 Mpa  
**Elongation at break:** 500%  
**Abrasion:** 100 mm<sup>3</sup>

**Features:** Unique two colour rubber sheet with good abrasion and tear resistance.

**Application:** Used as scraper rubber to clean conveyor belts.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
10	1,5	10	SW64110 10/0
15	1,5	10	SW64110 15/0
20	1,5	10	SW64110 20/0
25	1,5	10	SW64110 25/0



## Mining & Para Triton Sandwich

**Colour:** Black/Red/Black or Black/Green/Black  
**Temperature range:** -40° to +70°C  
**Specific gravity:** 1,15 grs/cm<sup>3</sup>  
**Hardness:** 60/45/60 Shore A +/- 5  
**Tensile strength:** 15 Mpa  
**Elongation at break:** 500%  
**Abrasion:** 100 mm<sup>3</sup>

**Features:** Unique two colour rubber sheet with good abrasion and tear resistance.

**Application:** Used as scraper rubber to clean conveyor belts.

Thickness (mm)	Width (mm)	Length (mtr)	Article nr.
15	100	10	SW64110 15/0-100
15	120	10	SW64110 15/0-120
15	150	10	SW64110 15/0-150
15	200	10	SW64110 15/0-200
20	100	10	SW64110 20/0-100
20	120	10	SW64110 20/0-120
20	150	10	SW64110 20/0-150
20	200	10	SW64110 20/0-200



# Repair Strips & Patches

**Temperature range:** -40° to +70°C  
**Specific gravity:** 1,15 grs/cm<sup>3</sup>  
**Hardness:** 60 Shore A +/- 5  
**Tensile strength:** 17 Mpa  
**Elongation at break:** 470%  
**Abrasion:** 120 mm<sup>3</sup>

**Features:** Neoprene backed strips and patches to repair conveyor belts. Compatible with all brands of adhesive solvent worldwide. Available with and without EP insertion.

**Application:** Repair of conveyor belts.



## Patches

Thickness (mm)	Insertion(s)	Width (mm)	Length (mm)	Article nr.
2,3	0	160	130	PATCH WO 130
2,3	0	260	200	PATCH WO 200
2,3	0	360	270	PATCH WO 270
3,7	1	160	130	PATCH WI 130
3,7	1	260	200	PATCH WI 200
3,7	1	360	270	PATCH WI 270

## Strips

Thickness (mm)	Insertion(s)	Width (mm)	Length (mtr)	Article nr.
1,7	0	50	10	STRIP WO 50
2,2	0	70	10	STRIP WO 70
2,2	0	100	10	STRIP WO 100
3,2	0	150	10	STRIP WO 150
3,2	0	220	10	STRIP WO 220
1,7	0	300	10	STRIP WO 300
4,6	1	70	10	STRIP WI 70
4,6	1	100	10	STRIP WI 100
4,6	1	150	10	STRIP WI 150
4,6	1	220	10	STRIP WI 220
4,6	1	300	10	STRIP WI 300
4,6	1	400	10	STRIP WI 400



## Mining & Para Impact Bars

**Features:** Impact bars absorb the drop energy of material impact through their special rubber substrate.

- Combination of polyethylene (PE) and special rubber
- With one side ramp
- Easy and quick mounting

**Application:** Impact protection for conveyor belts at the material feed and transferpoints.

**Colour:** Blue  
**Hardness:** 60 Shore A +/- 5

Height (mm)	Width (mm)	Length (mtr)	Article nr.
50	100	1,2	IB50120B
50	100	1,5	IB50150B
75	100	1,2	IB75120B
75	100	1,5	IB75150B

**Colour:** Red  
**Hardness:** 45 Shore A +/- 5

Height (mm)	Width (mm)	Length (mtr)	Article nr.
50	100	1,2	IB50120R
50	100	1,5	IB50150R
75	100	1,2	IB75120R
75	100	1,5	IB75150R



## Welcome to Zenith Rubber Europe

Since 2012 we represent the European market for Zenith Industrial Rubber Products Pvt.Ltd. This is one of the biggest producers of high quality rubber sheeting, wear rubber, pulley lagging, coated fabrics, flooring and matting in the world.

Zenith Rubber has been at the forefront of manufacturing industrial rubber products since 1965. Today it holds the leadership status as a major distributor of high quality rubber sheeting, rubber flooring, coated fabrics and rubber mats. Zenith is a Government Recognized Export House with a current installed capacity of 40,000 tons of rubber products per annum.


Together with its dedicated team of well trained personal with a excellent reputation of being able to innovate and holding up the maximum of Total Quality Management, Zenith has built up a wide range of discerning customers all over the world. Over 90% of its products are distributed to five continents around the world.

### Diamond Lagging Rubber Sheet

Diamond Lagging Rubber is used as a protective surface to improve and extend pulley life. It is applied to the pulley exterior, protecting the metal shell from wear and tear. The rubber diamond texture enhances friction between the belt and pulley, resulting into improved grip, better water shedding and less belt slippage. It is cost efficient and easily replaceable.

The pulley lagging sheets are produced with CN bonding layers for better adhesion levels. The profiled patterns on the top surface in diamond or square embossing improve belt grip and tracking on conveyors, while reducing belt wear.

Zenith can supply lagging rubber in various types and dimensions produced on rotocure.

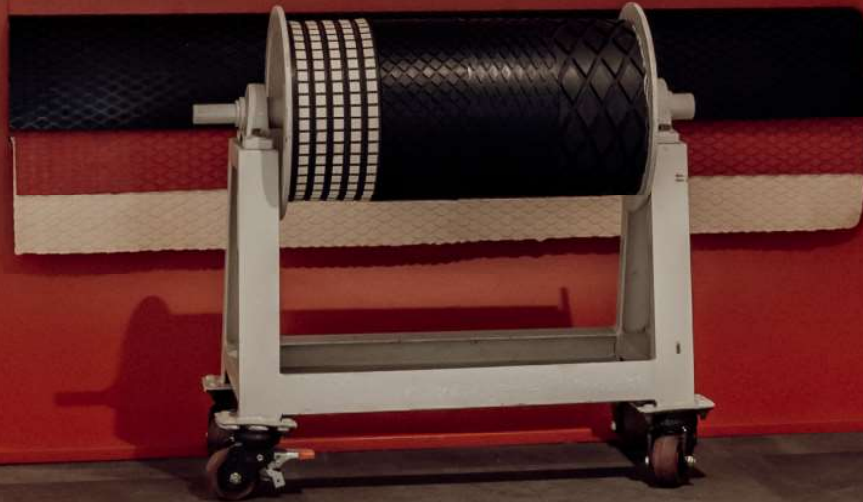

**ZENITH**  
Rubber Europe  
Anti Skid Flooring

Anti Skid Flooring provides a variety of Anti-Skid Piles for transportation use with primary application in providing a durable, wear-resistant floor. Our various anti-skid piles are available in different dimensions and are designed for use in high-traffic, high-traffic areas. Sliding mats with anti-skid ridges provide slip & fall with some with additional diamond texture in order to create stronger grip and safety. These mats are available in various, continuous, depending on your requirement.

**Anti Skid Piles**

Black Anti Skid Pile	Yellow Anti Skid Pile	Grey Anti Skid Pile	Blue Anti Skid Pile
Green Anti Skid Pile	Orange Anti Skid Pile	White Anti Skid Pile	Red Anti Skid Pile
Black Anti Skid Pile	Grey Anti Skid Pile	Blue Anti Skid Pile	White Anti Skid Pile

**Fire Retardant**

Our Fire Retardant mats are specially formulated with fire-retardant additives, providing excellent fire resistance. These mats are available in various, continuous, depending on your requirement.

**Electrical Matting**

These mats are specially formulated with fire-retardant additives, providing excellent fire resistance. These mats are available in various, continuous, depending on your requirement.



# PU

## PU 70 Shore

<b>Quality</b>	PU
<b>Colour</b>	Ochreous
<b>Temperature range</b>	-40° to +75°C
<b>Specific gravity</b>	1,24 grs/cm <sup>3</sup>
<b>Hardness</b>	70 Shore A +/- 5
<b>Tensile strength</b>	24,5 Mpa
<b>Elongation at break</b>	450%

**Features** Good abrasion resistance, very high tensile strength, tear strength and load bearing capabilities. It has resistance to oils, certain solvents, greases, ozone, sunlight and weather.

**Application** Heavy wear applications. Scrapers, gaskets et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1	2/4	PU70 1/0
2	1	2/4	PU70 2/0
3	1	2/4	PU70 3/0
4	1	2/4	PU70 4/0
5	1	2/4	PU70 5/0
6	1	2/4	PU70 6/0
8	1	2/4	PU70 8/0
10	1	2/4	PU70 10/0
12	1	2/4	PU70 12/0
14	1	2/4	PU70 14/0
15	1	2/4	PU70 15/0
20	1	2/4	PU70 20/0
25	1	2	PU70 25/0
30	1	2	PU70 30/0
35	1	2	PU70 35/0
40	1	2	PU70 40/0
45	1	2	PU70 45/0
50	1	2	PU70 50/0



# PU

## PU 80 Shore

<b>Quality</b>	PU
<b>Colour</b>	Ochreous
<b>Temperature range</b>	-40° to +75°C
<b>Specific gravity</b>	1,26 grs/cm <sup>3</sup>
<b>Hardness</b>	80 Shore A +/- 5
<b>Tensile strength</b>	45 Mpa
<b>Elongation at break</b>	580%

**Features** Good abrasion resistance, very high tensile strength, tear strength and load bearing capabilities. It has resistance to oils, certain solvents, greases, ozone, sunlight and weather.

**Application** Heavy wear applications. Scrapers, gaskets et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1	2/4	PU80 1/0
2	1	2/4	PU80 2/0
3	1	2/4	PU80 3/0
4	1	2/4	PU80 4/0
5	1	2/4	PU80 5/0
6	1	2/4	PU80 6/0
8	1	2/4	PU80 8/0
10	1	2/4	PU80 10/0
12	1	2/4	PU80 12/0
14	1	2/4	PU80 14/0
15	1	2/4	PU80 15/0
20	1	2/4	PU80 20/0
25	1	2	PU80 25/0
30	1	2	PU80 30/0
35	1	2	PU80 35/0
40	1	2	PU80 40/0
45	1	2	PU80 45/0
50	1	2	PU80 50/0





# PU

## PU 90 Shore

<b>Quality</b>	PU
<b>Colour</b>	Ochreous
<b>Temperature range</b>	-40° to +75°C
<b>Specific gravity</b>	1,27 grs/cm <sup>3</sup>
<b>Hardness</b>	90 Shore A +/- 5
<b>Tensile strength</b>	48 Mpa
<b>Elongation at break</b>	610%

**Features** Good abrasion resistance, very high tensile strength, tear strength and load bearing capabilities. It has resistance to oils, certain solvents, greases, ozone, sunlight and weather.

**Application** Heavy wear applications. Scrapers, gaskets et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1	2/4	PU80 1/0
2	1	2/4	PU80 2/0
3	1	2/4	PU80 3/0
4	1	2/4	PU80 4/0
5	1	2/4	PU80 5/0
6	1	2/4	PU80 6/0
8	1	2/4	PU80 8/0
10	1	2/4	PU80 10/0
12	1	2/4	PU80 12/0
14	1	2/4	PU80 14/0
15	1	2/4	PU80 15/0
20	1	2/4	PU80 20/0
25	1	2	PU80 25/0
30	1	2	PU80 30/0
35	1	2	PU80 35/0
40	1	2	PU80 40/0
45	1	2	PU80 45/0
50	1	2	PU80 50/0





A384  
A383

A361  
A360

PU 70  
1000

PU 70  
1000

PU 70

PU 70  
1000

PU 70  
1000

PU 70  
1000





Zenith Rubber Europe  
Utrechtsestraatweg 230  
3911 TX Rhenen  
The Netherlands

T +31 (0)88 618 93 40  
info@zenitheurope.com  
www.zenitheurope.com

Discover rubber solutions on [ZenithEurope.com](https://www.zenitheurope.com)

---