



Rubber Europe

Quality rubber solutions inside.

## A brief introduction

### ***About Zenith Rubber Europe***

*Zenith Rubber Europe is a Dutch based supplier of high quality rubber products since 2010. The large stock of rubber sheets and matting in different qualities and sizes enables us to supply different industries throughout Europe. We aim to provide our customers an excellent solution by our well-trained staff, own laboratory and prompt order processing. In case you can not find your rubber product within our standard range, please contact us to help you find a customized solution.*

### ***About Zenith Industrial Rubber Products Pvt. Ltd.***

*Zenith Industrial Rubber Products Pvt. Ltd. is an industrial rubber products manufacturing company based in Mumbai, India. Founded in 1965, Zenith is now one of the major exporters of quality rubber solutions globally. More than 90% of the goods are exported over five continents in the world. Europe has grown to be the largest market for Zenith since several years.*

T +31 (0)88 618 93 40

F +31 (0)88 618 93 97

info@zenitheurope.com



p5 - p9

## SBR rubber sheets



p11 - p16

## NBR rubber sheets



p17 - p24

## EPDM rubber sheet



p25 - p30

## CR rubber sheet



p31 - p43

## Mining & Para



p45 - p52

## Food Grade rubber sheet



p53 - p55

## FKM rubber sheets



p57 - p60

## Various



p61 - p71

## Rubber matting









# SBR rubber sheets

*NR / SBR rubber avails of excellent mechanical characteristics. It is often used in circumstances subject to heavy wear. It is commonly used in the mining industry as well as in industrial applications.*


A

Quality rubber solutions.

---



Rubber Europe

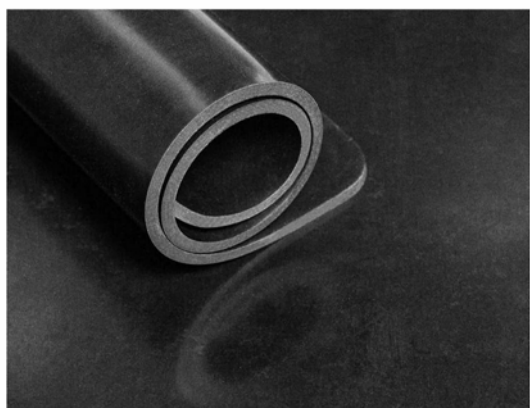

## SBR rubber sheet


### Black Miami

**Quality:** NR/SBR  
**Colour:** Black  
**Temperature range:** -30° to +70°C  
**Specific gravity:** 1,5 grs/cm<sup>3</sup>  
**Hardness:** 70 Shore A +/- 5  
**Tensile strength:** 3 Mpa  
**Elongation at break:** 200%

**Features:** Widely used industrial rubber quality with good mechanical properties, abrasion and shock resistance.

**Application:** General purpose gaskets, shock absorbers, conveyer belts, insulation et cetera.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	10/20	SX70150 1/0
1,5	0/1	cotton	1,4/1,2	15	SX70150 1,5/0
2	0/1	cotton	1,4/1,2	10	SX70150 2/0
3	0/1/2	cotton	1,4/1,2	10	SX70150 3/0
4	0/1/2	cotton/EP100	1,4/1,2	10	SX70150 4/0
5	0/1/2	cotton	1,4/1,2	10	SX70150 5/0
6	0/1/2	cotton/EP100	1,4/1,2	10	SX70150 6/0
8	0/2	cotton	1,4/1,2	5/10	SX70150 8/0
10	0/2	cotton	1,4/1,2	5/10	SX70150 10/0
10	0	-	1	1	SX70150 10/0-1x1
12	0	-	1,4	5	SX70150 12/0
15	0	-	1,4	5	SX70150 15/0
15	0	-	1	1	SX70150 15/0-1x1
20	0	-	1,4	5	SX70150 20/0
20	0	-	1	1	SX70150 20/0-1x1
25	0	-	1,4	5	SX70150 25/0
25	0	-	1	1	SX70150 25/0-1x1
30	0	-	1,4	5	SX70150 30/0
30	0	-	1	1	SX70150 30/0-1x1
40	0	-	1	1	SX70150 40/0-1x1
50	0	-	1	1	SX70150 50/0-1x1

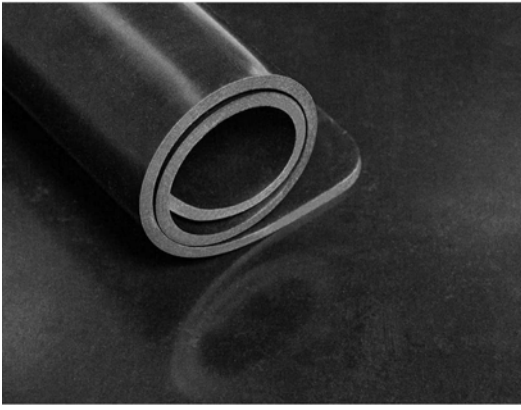

## SBR rubber sheet

### Zenstar


<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-40° to +75°C
<b>Specific gravity:</b>	1,3 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	6 Mpa
<b>Elongation at break:</b>	350%
<b>Abrasion:</b>	250 mm <sup>3</sup>

**Features:** Widely used industrial rubber quality with good mechanical properties, abrasion and shock resistance.

**Application:** General purpose gaskets, shock absorbers, conveyer belts, insulation et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	SB65130 1/0
1,5	1,4	15	SB65130 1,5/0
2	1,4	10	SB65130 2/0
3	1,4	10	SB65130 3/0
4	1,4	10	SB65130 4/0
5	1,4	10	SB65130 5/0
6	1,4	10	SB65130 6/0
8	1,4/2	10	SB65130 8/0
10	1,4/2	5/10	SB65130 10/0



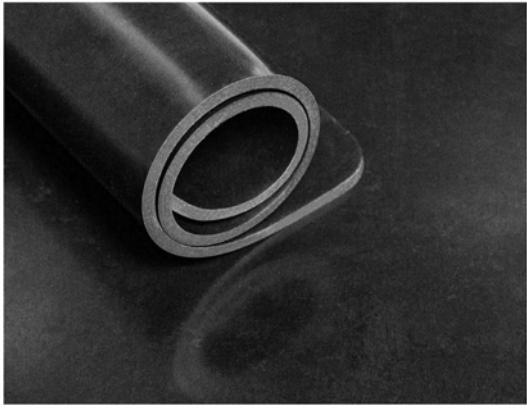

## SBR rubber sheet

### Black Miami 50

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,5 grs/cm <sup>3</sup>
<b>Hardness:</b>	50 Shore A +/- 5
<b>Tensile strength:</b>	3 Mpa
<b>Elongation at break:</b>	200%

**Features:** Widely used industrial rubber quality with good mechanical properties, abrasion and shock resistance.

**Application:** General purpose gaskets, shock absorbers, conveyer belts, insulation et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,40	10	SX50150 2/0
3	1,40	10	SX50150 3/0
4	1,40	10	SX50150 4/0
5	1,40	10	SX50150 5/0
6	1,40	10	SX50150 6/0
8	1,40	5	SX50150 8/0
10	1,40	5	SX50150 10/0





# Welcome to Zenith Rubber Europe

the European market for Zenith Industrial Rubber Products Pvt.Ltd. producers of high quality rubber sheeting, wear rubber, pulley covering and matting in the world.

at the forefront of manufacturing industrial rubber products since leadership status as a major distributor of high quality rubber sheeted fabrics and rubber mats. Zenith is a Government Recognized current installed capacity of 40,000 tons of rubber products per ann

ated team of well trained personal with a excellent reputation of b Rubber Europe holding up the maximum of Total Quality Management, Zenith has f discerning customers all over the world. Over 90% of it's product continents around the world.

## Diamond Lagging Rubber Sheet

er is used as a protective surface to improve and extend pulley life. exterior, protecting the metal shell from wear and tear. The rubber nces friction between the belt and pulley, resulting into improved g and less belt slippage. It is cost efficient and easily replaceable.

ets are produced with CN bonding layers for better adhesion level on the top surface in diamond or square embossing improve belt g rors, while reducing belt wear.

ing rubber in various types and dimensions produced on rotocure.



## Rubber Europe Rubber Sheeting for Mining Industry

Diamond rubber sheeting for mining industry is of high quality, flexible and cost effective. The products are dedicated to resolve the problem in the industry it enables the user to improve the performance of the equipment by providing features like good resistant to cut, wear and abrasion as per mining industry standards.

Natural rubber is an outstanding abrasion resistant material, providing excellent performance in handling slurries. The inherent properties of strength, resilience and elasticity have a direct effect on the wear performance.



### Anti Skid Flooring

we provide a variety of Anti-Skid Mats for multipurpose use with primary purpose to provide a durable, non-slip floor mat. Our various anti-slip mats are designed to provide excellent shock absorption and slip resistance as well as improved wear resistance. Heavy duty mats with anti-slip ridges prevent slips & falls and come in various thicknesses in order to make cleaning quick and easy. This is available in various compounds depending on their intended use.





## NBR rubber sheets

*Nitrile rubber has a perfect general resistance to oil along with good mechanical characteristics such as tensile strength, flexibility, compression set, and impermeability to gases. It contains moderate aging features and good adhesion to metal. It also avails of good resistance to inorganic chemical products except antioxidant agents and chlorine. However it should not be exposed to ozone, sunlight or weather.*


**B**

Quality rubber solutions.





Rubber Europe

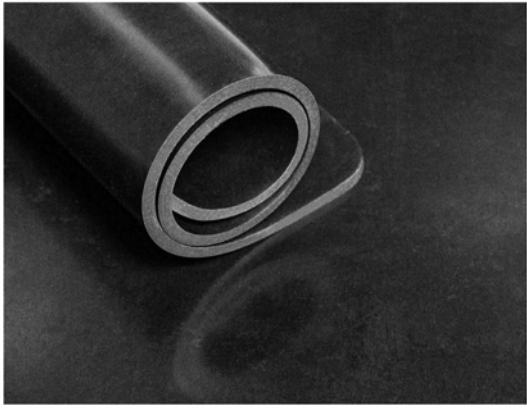

## NBR rubber sheet


### Satyr Eco

<b>Quality:</b>	NBR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +90°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	70 Shore A +/- 5
<b>Tensile strength:</b>	4 Mpa
<b>Elongation at break:</b>	200%

**Features:** Widely used oil and grease resistant industrial rubber quality with good mechanical properties.

**Application:** Chemical industries, garages, workshops et cetera.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	20	NB7010 1/0
1,5	0/1	nylon	1,4	15	NB7010 1,5/0
2	0/1	nylon	1,2/1,4	10	NB7010 2/0
3	0/1/2	nylon	1,2/1,4	10	NB7010 3/0
4	0/1/2	nylon	1,2/1,4	10	NB7010 4/0
5	0/1/2	nylon	1,2/1,4	10	NB7010 5/0
6	0/2	nylon	1,2/1,4	10	NB7010 6/0
8	0/2	nylon	1,2/1,4	5	NB7010 8/0
10	0/2	nylon	1,2/1,4	5	NB7010 10/0
12	0	-	1,4	5	NB7010 12/0
15	0	-	1,4	5	NB7010 15/0
20	0	-	1,4	2/5	NB7010 20/0
30	0	-	1,4	2	NB7010 30/0
40	0	-	1,4	2	NB7010 40/0
50	0	-	1,4	2	NB7010 50/0

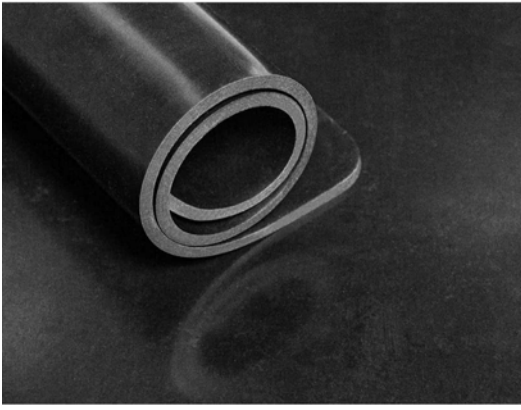

## NBR rubber sheet

### Satyr Medium


<b>Quality:</b>	NBR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-25° to +80°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	70 Shore A +/- 5
<b>Tensile strength:</b>	5 Mpa
<b>Elongation at break:</b>	250%

**Features:** Widely used oil and grease resistant industrial rubber quality with good mechanical properties. Resistant to gasoline, oil, propane, natural gas and coal gas.

**Application:** Chemical industries, garages, workshops et cetera.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,2/1,4	20	NB70140 1/0
1,5	0	-	1,4	15	NB70140 1,5/0
2	0/1	nylon	1,2/1,4	10	NB70140 2/0
3	0/1/2	nylon	1,2/1,4	10	NB70140 3/0
4	0/2	nylon	1,2/1,4	10	NB70140 4/0
5	0	-	1,2/1,4	10	NB70140 5/0
6	0	-	1,4	10	NB70140 6/0
8	0	-	1,4	5	NB70140 8/0
10	0	-	1,4	5	NB70140 10/0



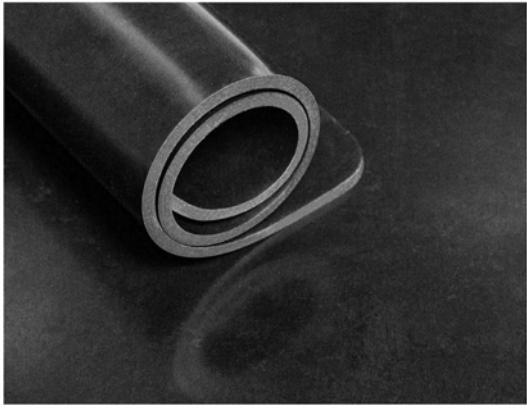

## NBR rubber sheet


### Satyr Premium

<b>Quality:</b>	NBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +110°C
<b>Specific gravity:</b>	1,35 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	10 Mpa
<b>Elongation at break:</b>	350%

**Features:** Excellent oil and grease resistant industrial rubber quality with good mechanical properties. Resistant to oil, super, pentane and bio-diesel.

**Application:** Chemical industries, garages, workshops et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	NB65130 1/0
1,5	1,4	15	NB65130 1,5/0
2	1,4	10	NB65130 2/0
3	1,4	10	NB65130 3/0
4	1,4	10	NB65130 4/0
5	1,4	10	NB65130 5/0
6	1,4	10	NB65130 6/0
8	1,4	5	NB65130 8/0
10	1,4	5	NB65130 10/0

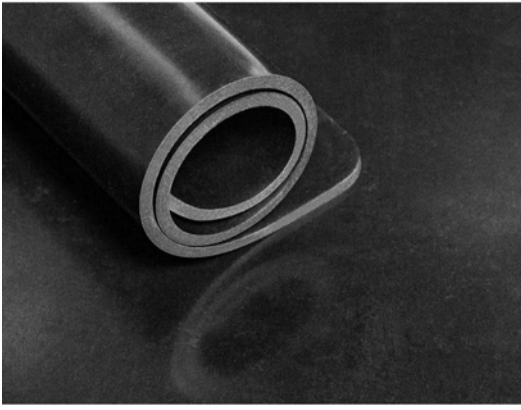

## NBR rubber sheet

### Satyr 50

<b>Quality:</b>	NBR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +90°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	50 Shore A +/- 5
<b>Tensile strength:</b>	4 Mpa
<b>Elongation at break:</b>	200%

**Features:** Widely used oil and grease resistant industrial rubber quality with good mechanical properties.

**Application:** Chemical industries, garages, workshops et cetera.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	20	NB5010 1/0
2	0	-	1,4	10	NB5010 2/0
3	0	-	1,4	10	NB5010 3/0
4	0	-	1,4	10	NB5010 4/0
5	0	-	1,4	10	NB5010 5/0
6	0	-	1,4	10	NB5010 6/0
8	0	-	1,4	5	NB5010 8/0
10	0	-	1,4	5	NB5010 10/0

# EPDM rubber sheets

*EPDM has an excellent operating temperature range.*


*It is highly recommended for outdoor purposes as it is extremely resistant to ozone, oxygen and many chemicals and solvents. It is often used for roofing sheets and weather strips. EPDM does not have good oil resistance or adhesion features.*

Quality rubber solutions.





Rubber Europe

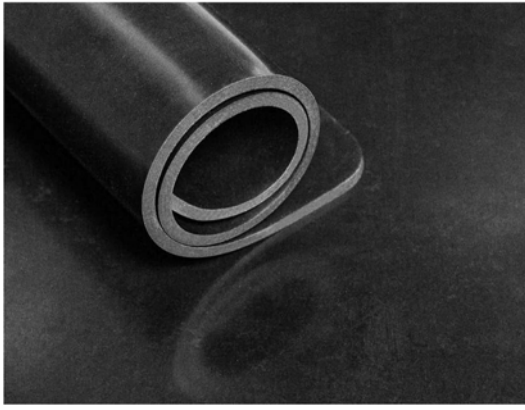

## EPDM rubber sheet


### Manticore Eco

<b>Quality:</b>	EPDM/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +90°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	70 Shore A +/- 5
<b>Tensile strength:</b>	4 Mpa
<b>Elongation at break:</b>	200%

**Features:** Widely used weather and cold resistant industrial rubber quality with good mechanical properties and chemical resistance. Suitable for open air and good ozon resistance.

**Application:** Automotive industry, outdoor use and solar panels.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	20	EP7010 1/0
1,5	0	-	1,4	15	EP7010 1,5/0
2	0/1	nylon	1,2/1,4	10	EP7010 2/0
3	0/1/2	nylon	1,2/1,4	10	EP7010 3/0
4	0/1/2	nylon	1,2/1,4	10	EP7010 4/0
5	0/1/2	nylon	1,2/1,4	10	EP7010 5/0
6	0/2	nylon	1,2/1,4	10	EP7010 6/0
8	0/2	nylon	1,2/1,4	5	EP7010 8/0
10	0/2	nylon	1,2/1,4	5	EP7010 10/0
12	0	-	1,4	5	EP7010 12/0
15	0	-	1,4	5	EP7010 15/0
20	0	-	1,4	5/2	EP7010 20/0
25	0	-	1,4	5	EP7010 25/0
30	0	-	1,4	2	EP7010 30/0
40	0	-	1,4	2	EP7010 40/0
50	0	-	1,4	2	EP7010 50/0

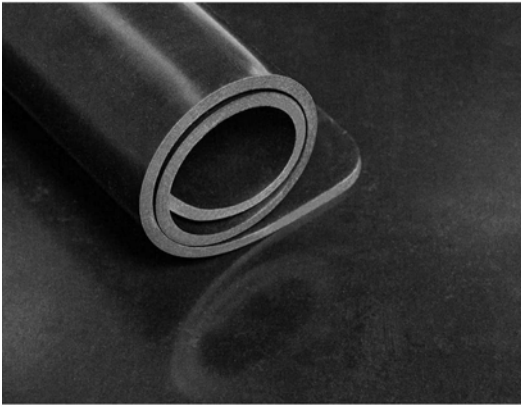

## EPDM rubber sheet

### Manticore Medium


<b>Quality:</b>	EPDM/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +90°C
<b>Specific gravity:</b>	1,35 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	6 Mpa
<b>Elongation at break:</b>	250%

**Features:** Widely used weather and cold resistant industrial rubber quality with good mechanical properties and chemical resistance. Suitable for open air and good ozon resistance.

**Application:** Automotive industry, outdoor use and solar panels.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	EP65130 1/0
1,5	1,4	15	EP65130 1,5/0
2	1,4	10	EP65130 2/0
3	1,4	10	EP65130 3/0
4	1,4	10	EP65130 4/0
5	1,4	10	EP65130 5/0
6	1,4	10	EP65130 6/0
8	1,4	5	EP65130 8/0
10	1,4	5	EP65130 10/0



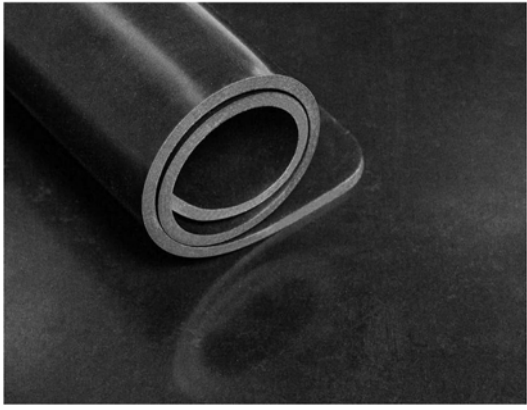

## EPDM rubber sheet


### Manticore Premium

<b>Quality:</b>	EPDM
<b>Colour:</b>	Black
<b>Temperature range:</b>	-40° to +130°C
<b>Specific gravity:</b>	1,25 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	8 Mpa
<b>Elongation at break:</b>	350%

**Features:** Excellent weather and cold resistant industrial rubber quality with good mechanical properties and chemical resistance. Suitable for open air and good ozon resistance.

**Application:** Automotive industry, hot water seals, outdoor use and solar panels.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	EP65120 1/0
2	1,4	10	EP65120 2/0
3	1,4	10	EP65120 3/0
4	1,4	10	EP65120 4/0
5	1,4	10	EP65120 5/0
6	1,4	10	EP65120 6/0
8	1,4	5	EP65120 8/0
10	1,4	5	EP65120 10/0

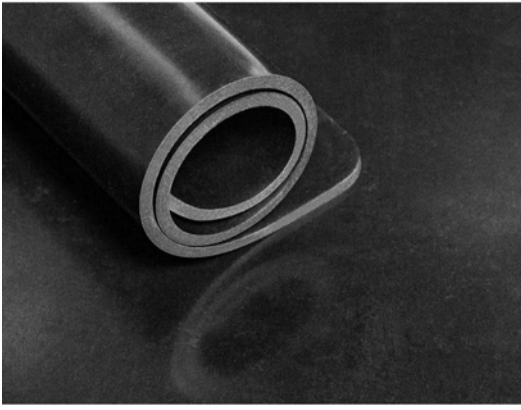

## EPDM rubber sheet


### Manticore 50

<b>Quality:</b>	EPDM/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +90°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	50 Shore A +/- 5
<b>Tensile strength:</b>	4 Mpa
<b>Elongation at break:</b>	200%

**Features:** Widely used weather and cold resistant industrial rubber quality with good mechanical properties and chemical resistance. Suitable for open air and good ozon resistance.

**Application:** Automotive industry, outdoor use and solar panels.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	EP5010 2/0
3	1,4	10	EP5010 3/0
4	1,4	10	EP5010 4/0
5	1,4	10	EP5010 5/0
6	1,4	10	EP5010 6/0
8	1,4	5	EP5010 8/0
10	1,4	5	EP5010 10/0

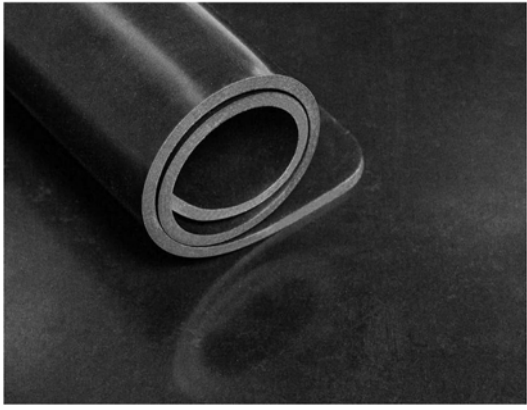

## EPDM rubber sheet

### Manticore Aqua


<b>Quality:</b>	EPDM
<b>Colour:</b>	Black
<b>Temperature range:</b>	-40° to +120°C
<b>Specific gravity:</b>	1,15 grs/cm <sup>3</sup>
<b>Hardness:</b>	70 Shore A +/- 5
<b>Tensile strength:</b>	11,5 Mpa
<b>Elongation at break:</b>	350%

**Features:** Potable water rubber sheet, according to different European standards. Certificates available on request.

**Application:** Water fitting (supplying) parts e.g., gaskets, membranes, washers that are used in contact with drinking water.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	EP70110W 2/0
3	1,4	10	EP70110W 3/0
4	1,4	10	EP70110W 4/0
5	1,4	10	EP70110W 5/0
6	1,4	10	EP70110W 6/0
8	1,4	5	EP70110W 8/0
10	1,4	5	EP70110W 10/0



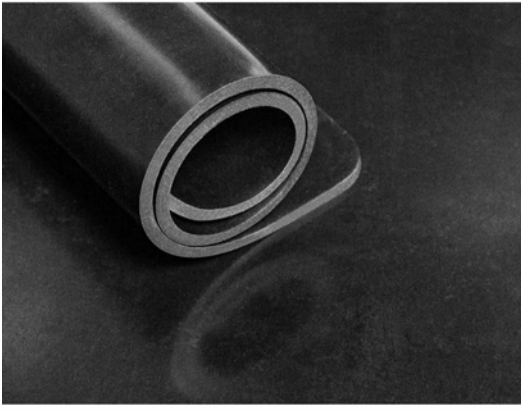

## EPDM rubber sheet

### Manticore Peroxid

<b>Quality:</b>	EPDM
<b>Colour:</b>	Black
<b>Temperature range:</b>	-40° to +140°C
<b>Specific gravity:</b>	1,25 grs/cm <sup>3</sup>
<b>Hardness:</b>	70 Shore A +/- 5
<b>Tensile strength:</b>	9 Mpa
<b>Elongation at break:</b>	200%

**Features:** Excellent weather and cold resistant peroxid cured industrial rubber quality with good mechanical properties, chemical resistance and a high temperature range. Suitable for open air and good ozon resistance.

**Application:** Automotive industry, hot water seals, outdoor use and solar panels.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	EP70122PC 1/0
2	1,4	10	EP70122PC 2/0
3	1,4	10	EP70122PC 3/0
4	1,4	10	EP70122PC 4/0
5	1,4	10	EP70122PC 5/0

## CR rubber sheets

*CR provides for a combination of characteristics that make it the best multi-function rubber. It is used by applications that have contact with oils and other chemical products. It has a good resistance to temperature changes, ozone action, and adverse weather conditions, therefore it can be applied for outdoor applications. It can be compounded to have flame retardant properties.*


D

Quality rubber solutions.

---



Rubber Europe

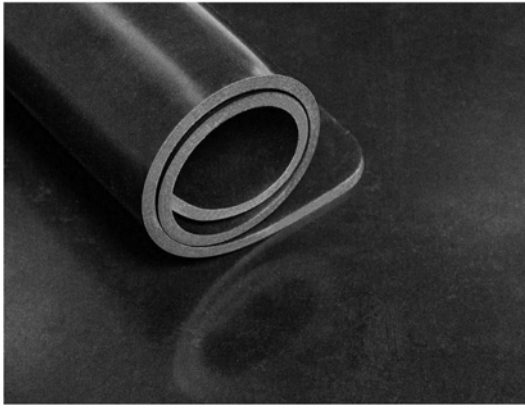

## CR rubber sheet

### Wendigo Eco


<b>Quality:</b>	CR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +90°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	70 Shore A +/- 5
<b>Tensile strength:</b>	4 Mpa
<b>Elongation at break:</b>	200%

**Features:** Widely used chloroprene industrial rubber with good mechanical properties, moderate oil and ozone resistance.

**Application:** Offshore and industry.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	20	CR7010 1/0
1,5	0/1	nylon	1,4	10	CR7010 1,5/0
2	0/1	nylon	1,4	10	CR7010 2/0
3	0/1/2	nylon	1,4	10	CR7010 3/0
4	0/1/2	nylon	1,4	10	CR7010 4/0
5	0/1/2	nylon	1,4	10	CR7010 5/0
6	0/2	nylon	1,4	10	CR7010 6/0
8	0/2	nylon	1,4	10	CR7010 8/0
10	0/2	nylon	1,4	5/10	CR7010 10/0
10	0	-	1	1	CR7010 10/0-1x1
12	0	-	1,4	5	CR7010 12/0
15	0	-	1,4	5	CR7010 15/0
15	0	-	1	1	CR7010 15/0-1x1
20	0	-	1,4	5/2	CR7010 20/0
20	0	-	1	1	CR7010 20/0-1x1
25	0	-	1,4	5	CR7010 25/0
25	0	-	1	1	CR7010 25/0-1x1
30	0	-	1,4	2	CR7010 30/0
40	0	-	1,4	2	CR7010 40/0
50	0	-	1,4	2	CR7010 50/0



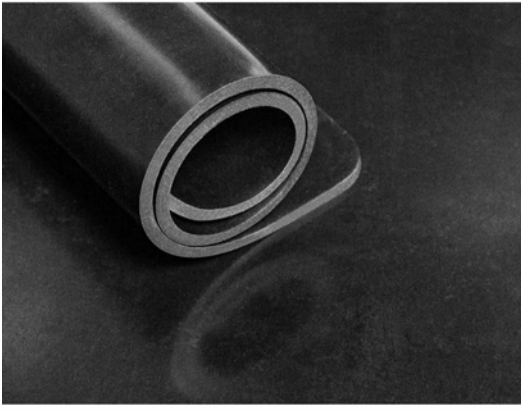

## CR rubber sheet


### Wendigo Medium

<b>Quality:</b>	CR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +90°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	70 Shore A +/- 5
<b>Tensile strength:</b>	5 Mpa
<b>Elongation at break:</b>	250%

**Features:** Widely used chloroprene industrial rubber with good mechanical properties, moderate oil and ozone resistance.

**Application:** Offshore and industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	NE70140 1/0
1,5	1,4	15	NE70140 1,5/0
2	1,4	10	NE70140 2/0
3	1,4	10	NE70140 3/0
4	1,4	10	NE70140 4/0
5	1,4	10	NE70140 5/0
6	1,4	10	NE70140 6/0
8	1,4	5	NE70140 8/0
10	1,4	5	NE70140 10/0

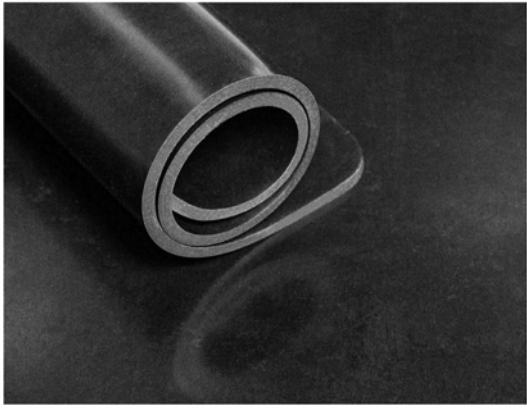

## CR rubber sheet


### Wendigo Premium

**Quality:** CR  
**Colour:** Black  
**Temperature range:** -25° to +100° C  
**Specific gravity:** 1,4 grs/cm<sup>3</sup>  
**Hardness:** 65 Shore A +/- 5  
**Tensile strength:** 10 Mpa  
**Elongation at break:** 400%

**Features:** Excellent chloroprene industrial rubber with good resistance to heat, ozone, weathering and oil. Gives good adhesive to metal and has flame retardant properties.

**Application:** Offshore and industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	NE65140 1/0
2	1,4	10	NE65140 2/0
3	1,4	10	NE65140 3/0
4	1,4	10	NE65140 4/0
5	1,4	10	NE65140 5/0
6	1,4	10	NE65140 6/0
10	1,4	5	NE65140 10/0

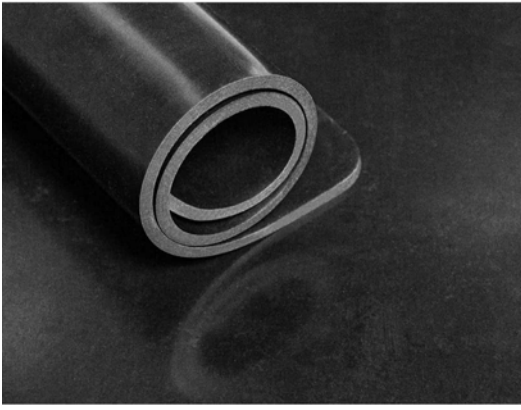

## CR rubber sheet

### Wendigo 50

<b>Quality:</b>	CR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +90°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	50 Shore A +/- 5
<b>Tensile strength:</b>	4 Mpa
<b>Elongation at break:</b>	200%

**Features:** Widely used chloroprene industrial rubber with good mechanical properties, moderate oil and ozone resistance.

**Application:** Offshore and industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	CR5010 2/0
3	1,4	10	CR5010 3/0
4	1,4	10	CR5010 4/0
5	1,4	10	CR5010 5/0
6	1,4	10	CR5010 6/0
8	1,4	5	CR5010 8/0
10	1,4	5	CR5010 10/0

# Mining & Para

*A wide range of wear and impact resistant rubber sheeting for the mining industry and other industries with an application that requires wear resistance, mechanical impact damages, erosion or corrosion.*

E

Quality rubber solutions.





Rubber Europe



## Mining & Para Typhon

**Quality:** NR (Para)  
**Colour:** Beige, Grey  
**Temperature range:** -30° to +70°C  
**Specific gravity:** 1,10 grs/cm<sup>3</sup>  
**Hardness:** 45 Shore A +/- 5  
**Tensile strength:** 15 Mpa  
**Elongation at break:** 600%  
**Abrasion:** 100 mm<sup>3</sup>

**Features:** Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion.

**Application:** Very wide range of applications, conveyor systems, pumps et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Colour	Article nr.
1	1,4	20	Beige	AB45110 1/0
1,5	1,4	15	Beige, Grey	AB45110 1,5/0
2	1,4	10	Beige, Grey	AB45110 2/0
3	1,4	10	Beige, Grey	AB45110 3/0
4	1,4	10	Beige, Grey	AB45110 4/0
5	1,4	10	Beige, Grey	AB45110 5/0
6	1,4	10	Beige, Grey	AB45110 6/0
8	1,4	5	Beige, Grey	AB45110 8/0
10	1,4	5	Beige, Grey	AB45110 10/0
12	1,4	5	Beige	AB45110 12/0
15	1,4	5	Beige	AB45110 15/0
20	1,4	5	Beige	AB45110 20/0



## Mining & Para Centaur Red (BL)

<b>Quality:</b>	NR (Para)
<b>Colour:</b>	Red
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	45 Shore A +/- 5
<b>Tensile strength:</b>	15 Mpa
<b>Elongation at break:</b>	600%
<b>Abrasion:</b>	100 mm <sup>3</sup>

**Features:** Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion (Also available with bonding layer).

**Application:** Very wide range of applications, conveyor systems, pumps et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Also available with	Article nr.
1	1,4	20	-	AB45110R 1/0
1,5	1,4	15	-	AB45110R 1,5/0
2	1,4	10	-	AB45110R 2/0
3	1,4	10	-	AB45110R 3/0
4	1,4/2	10	bonding layer	AB45110R 4/0
5	1,4	10	bonding layer	AB45110R 5/0
6	1,4/2	10	bonding layer	AB45110R 6/0
8	1,4/2	10	bonding layer	AB45110R 8/0
10	1,4/2	10	bonding layer	AB45110R 10/0
12	2	10	bonding layer	AB45110R 12/0
15	1,4/2	10	bonding layer	AB45110R 15/0
20	1,4/2	10	bonding layer	AB45110R 20/0



## Mining & Para Centaur Red Eco

<b>Quality:</b>	NR (Para)
<b>Colour:</b>	Red
<b>Temperature range:</b>	-40° to +70°C
<b>Specific gravity:</b>	1,20 grs/cm <sup>3</sup>
<b>Hardness:</b>	45 Shore A +/- 5
<b>Tensile strength:</b>	12 Mpa
<b>Elongation at break:</b>	500%
<b>Abrasion:</b>	150 mm <sup>3</sup>

**Features:** Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion.

**Application:** Very wide range of applications, conveyor systems, pumps et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,5	10	ABE45120R 3/0
4	1,5	10	ABE45120R 4/0
5	1,5	10	ABE45120R 5/0
6	2	10	ABE45120R 6/0
8	2	10	ABE45120R 8/0
10	2	10	ABE45120R 10/0
15	2	10	ABE45120R 15/0
20	2	10	ABE45120R 20/0





## Mining & Para Red Dragoon

<b>Quality:</b>	NR (Para)
<b>Colour:</b>	Red
<b>Finish:</b>	One side smooth other side fabric finish
<b>Temperature range:</b>	-40° to +75°C
<b>Specific gravity:</b>	0,98 grs/cm <sup>3</sup>
<b>Hardness:</b>	38 Shore A +/- 5
<b>Tensile strength:</b>	25 Mpa
<b>Elongation at break:</b>	900%
<b>Abrasion:</b>	80 mm <sup>3</sup>

**Features:** Premium resistance to abrasion with excellent tensile strength and high elasticity.

**Application:** Lining of slurry chutes, wear protection, conveyer systems and shooting ranges.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	Abrasuper40 2/0
3	1,4	10	Abrasuper40 3/0
4	1,4	10	Abrasuper40 4/0
5	1,4	10	Abrasuper40 5/0
6	1,4	10	Abrasuper40 6/0
8	1,4	5	Abrasuper40 8/0
10	1,4	5	Abrasuper40 10/0
30	1,4	5	Abrasuper40 30/0



## Mining & Para


### Red Dragoon Eco

<b>Quality:</b>	NR (Para)
<b>Colour:</b>	Red
<b>Temperature range:</b>	-25° to +70°C
<b>Specific gravity:</b>	0,98 grs/cm <sup>3</sup>
<b>Hardness:</b>	35 Shore A +/- 5
<b>Tensile strength:</b>	20 Mpa
<b>Elongation at break:</b>	650%
<b>Abrasion:</b>	88 mm <sup>3</sup>

**Features:** Premium resistance to abrasion with excellent tensile strength and high elasticity.

**Application:** Lining of slurry chutes, wear protection, conveyor systems and shooting ranges.

Thickness (mm)	Width (mtr)	Length (mtr)	Also available with	Article nr.
3	2	10	bonding layer	AB35100R 3/0
6	2	10	bonding layer	AB35100R 6/0
10	2	10	bonding layer	AB35100R 10/0
15	2	10	bonding layer	AB35100R 15/0
20	2	10	bonding layer	AB35100R 20/0

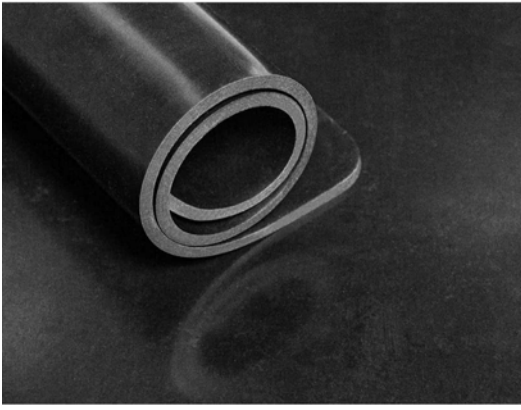


## Mining & Para Centaur Black 40

<b>Quality:</b>	NR (Para)
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	40 Shore A +/- 5
<b>Tensile strength:</b>	17 Mpa
<b>Elongation at break:</b>	600%
<b>Abrasion:</b>	120 mm <sup>3</sup>

**Features:** Good resistance to abrasion with high tensile strength and elasticity.

**Application:** Widely used in shot blasting industry, rubber lining for material handling equipment or any other crucial application to reduce wear and tear.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
4	1,4	10	AB40110 4/0
6	1,4	10	AB40110 6/0
8	1,4	10	AB40110 8/0
10	1,4	10	AB40110 10/0
15	1,4	10	AB40110 15/0
20	1,4	10	AB40110 20/0

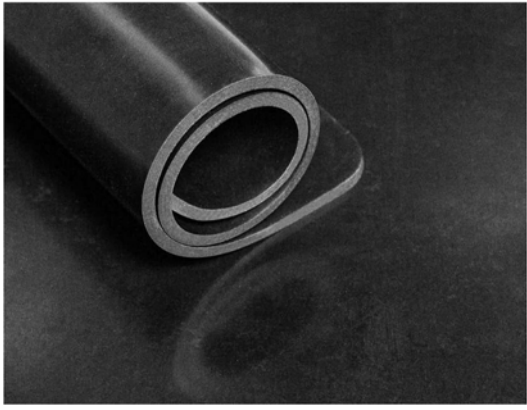

## Mining & Para Centaur Black (BL)

<b>Quality:</b>	NR (Para)
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,17 grs/cm <sup>3</sup>
<b>Hardness:</b>	60 Shore A +/- 5
<b>Tensile strength:</b>	13 Mpa
<b>Elongation at break:</b>	450%
<b>Abrasion:</b>	120 mm <sup>3</sup>

**Features:** Good resistance to abrasion with high tensile strength, elasticity and excellent adhesion. (Also available with bonding layer).

**Application:** Widely used in rubber lining for material handling equipment or any other crucial application to reduce wear and tear.

Thickness (mm)	Width (mtr)	Length (mtr)	Also available with	With bonding layer available with	Article nr.
3	1,4	10			AB60117 3/0
4	1,4	10	-		AB60117 4/0
5	1,4	10	-		AB60117 5/0
6	1,4/2	10	bonding layer	1,4/2	AB60117 6/0
8	1,4/2	10	bonding layer	1,4/2	AB60117 8/0
10	1,4/2	10	bonding layer	1,4/2	AB60117 10/0
12	2	10	bonding layer	2	AB60117 12/0
15	1,4/2	10	bonding layer	2	AB60117 15/0
20	1,4/2	10	bonding layer	1,4/2	AB60117 20/0
25	1,4/2	10	bonding layer	2	AB60117 25/0
30	1,4/2	10	bonding layer	2	AB60117 30/0





## Mining & Para Centaur NBR (BL)

<b>Quality:</b>	NBR/NR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-25° to +80°C
<b>Specific gravity:</b>	1,35 grs/cm <sup>3</sup>
<b>Hardness:</b>	60 Shore A +/- 5
<b>Tensile strength:</b>	6 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	220 mm <sup>3</sup>

**Features:** Good resistance to oil and abrasion with high tensile strength and elasticity.

**Application:** Widely used in rubber lining for material handling equipment or any other crucial application to reduce wear and tear.

Thickness (mm)	Width (mtr)	Length (mtr)	Also available with	Article nr.
8	2	10	bonding layer	NB60135 8/0
10	2	10	bonding layer	NB60135 10/0



## Mining & Para Pulley Lagging (BL)

<b>Quality:</b>	NR (Para)
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,17 grs/cm <sup>3</sup>
<b>Hardness:</b>	60 Shore A +/- 5
<b>Tensile strength:</b>	13 Mpa
<b>Elongation at break:</b>	450%
<b>Abrasion:</b>	120 mm <sup>3</sup>

**Features:** Good resistance to abrasion with a diamond /square shaped anti slip profile with bonding layer.

**Application:** To reduce belt slippage, wear of the drum and conveyor belt.

Thickness (mm)	Width (mtr)	Length (mtr)	Available design	Article nr.
6,6	1,5/2	10	mini	PL60117B 6/0
8	1,5/2	10	square/mini	PL60117B 8/0
10	1,5/2	10	square/mini	PL60117B 10/0
12	2	10	mini	PL60117B 12/0
15	2	10	mini/big	PL60117B 15/0



## Mining & Para Pulley Lagging NBR BL

<b>Quality:</b>	NBR/NR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-25° to +80°C
<b>Specific gravity:</b>	1,35 grs/cm <sup>3</sup>
<b>Hardness:</b>	60 Shore A +/- 5
<b>Tensile strength:</b>	6 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	220 mm <sup>3</sup>

**Features:** Good oil and abrasion resistant drum lagging with a diamond shaped anti slip profile with bonding layer.

**Application:** To reduce belt slippage, wear of the drum and conveyor belt.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
8	2	10	PL60135NB 8/0
10	2	10	PL60135NB 10/0



## Mining & Para Pulley Lagging BL Food Grade

<b>Quality:</b>	NR (Para)
<b>Colour:</b>	Off white, Blue
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	55 Shore A +/- 5
<b>Tensile strength:</b>	15 Mpa
<b>Elongation at break:</b>	600%
<b>Abrasion:</b>	120 mm <sup>3</sup>
<b>Certification:</b>	FDA and EC1935

**Features:** Food grade drum lagging with good resistance to abrasion with a diamond shaped anti slip profile with bonding layer.

**Application:** To reduce belt slippage, wear of the drum and conveyor belt in the food industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
8	2	10	PL55110B 8/0
10	2	10	PL55110B 10/0



## Mining & Para Pulley Lagging BL Red

<b>Quality:</b>	NR (Para)
<b>Colour:</b>	Red
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	45 Shore A +/- 5
<b>Tensile strength:</b>	15 Mpa
<b>Elongation at break:</b>	600%
<b>Abrasion:</b>	100 mm <sup>3</sup>

**Features:** Good resistance to abrasion with a diamond shaped anti slip profile with bonding layer.

**Application:** To reduce belt slippage, wear of the drum and conveyor belt.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
8	2	10	PL45110B 8/0



## Mining & Para Ceramic Pulley Lagging BL

<b>Quality:</b>	NR (Para)
<b>Colour:</b>	Black
<b>Temperature range:</b>	-40° to +70°C
<b>Specific gravity:</b>	1,10 grs/cm <sup>3</sup>
<b>Hardness:</b>	70 Shore A +/- 5
<b>Tensile strength:</b>	17 Mpa
<b>Elongation at break:</b>	450%
<b>Abrasion:</b>	100 mm <sup>3</sup>

**Features:** Ceramic equipped drum lagging with excellent abrasion resistance.

**Application:** Protective surface to improve and extend pulley life in applications for extreme conditions in wet and muddy areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
12	0,5	5	PLC70110 12/0
15	0,5	5	PLC70110 15/0



## Mining & Para

### Triton Sandwich

**Quality:** NR (Para)  
**Colour:** Black, Red, Black  
**Temperature range:** -40° to +70°C  
**Specific gravity:** 1,15 grs/cm<sup>3</sup>  
**Hardness:** 60/45/60 Shore A +/- 5  
**Tensile strength:** 15 Mpa  
**Elongation at break:** 500%  
**Abrasion:** 100 mm<sup>3</sup>

**Features:** Unique two colour rubber sheet with good abrasion and tear resistance.

**Application:** Used as scraper rubber to clean conveyor belts.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
15	1,5	10	SW64110 15/0
20	1,5	10	SW64110 20/0
25	1,5	10	SW64110 25/0



## Mining & Para

### Typhon Dustsealing

**Quality:** NR (Para)  
**Colour:** Black  
**Temperature range:** -25° to +70°C  
**Specific gravity:** 0,98 grs/cm<sup>3</sup>  
**Hardness:** 40 Shore A +/- 5  
**Tensile strength:** 20 Mpa  
**Elongation at break:** 650%  
**Abrasion:** 90 mm<sup>3</sup>

**Features:** A black soft NR sheet with both sides fabric finish.


**Application:** Used as dustsealing.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1,5	1,4	20	AB40100SP 1,5/0
2	1,4	20	AB40100SP 2/0



# Repair Strips & Patches

**Quality:** NR (Para)  
**Temperature range:** -40° to +70°C  
**Specific gravity:** 1,15 grs/cm<sup>3</sup>  
**Hardness:** 60 Shore A +/- 5  
**Tensile strength:** 17 Mpa  
**Elongation at break:** 470%  
**Abrasion:** 120 mm<sup>3</sup>

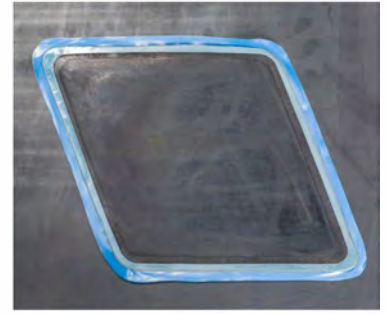

**Features:** Neoprene backed strips and patches to repair conveyor belts. Compatible with all brands of adhesive solvent worldwide. Available with and without EP insertion.

**Application:** Repair of conveyor belts.

## Patches

Thickness (mm)	Insertion(s)	Width (mm)	Length (mm)	Article nr.
2,3	0	160	130	PATCH WO 130
2,3	0	260	200	PATCH WO 200
2,3	0	360	270	PATCH WO 270
3,7	1	160	130	PATCH WI 130
3,7	1	260	200	PATCH WI 200
3,7	1	360	270	PATCH WI 270

## Strips

Thickness (mm)	Insertion(s)	Width (mm)	Length (mt r)	Article nr.
1,7	0	50	10	STRIP WO 50
2,2	0	70	10	STRIP WO 70
2,2	0	100	10	STRIP WO 100
3,2	0	150	10	STRIP WO 150
3,2	0	220	10	STRIP WO 220
1,7	0	300	10	STRIP WO 300
4,6	1	70	10	STRIP WI 70
4,6	1	100	10	STRIP WI 100
4,6	1	150	10	STRIP WI 150
4,6	1	220	10	STRIP WI 220
4,6	1	300	10	STRIP WI 300
4,6	1	400	10	STRIP WI 400

# Food Grade rubber sheets

*Food Grade rubber types are compliant with the European regulations (EC) n.1935/2004 and 2023/2006. The materials are in compliance with FDA. This product is widely used in the food and beverage industry.*

F

Quality rubber solutions.

---



Rubber Europe



## Food Grade rubber sheets

### Pegasus SBR

**Quality:** NR/SBR  
**Colour:** Off white  
**Temperature range:** -30° to +70°C  
**Specific gravity:** 1,5 grs/cm<sup>3</sup>  
**Hardness:** 60 Shore A +/- 5  
**Tensile strength:** 6 Mpa  
**Elongation at break:** 300%

**Features:** A white, odourless and tasteless SBR rubber with excellent mechanical properties. Food quality according to FDA and EC1935/2004.

**Application:** Food industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	SB60150F 1/0
2	1,4	10	SB60150F 2/0
3	1,4	10	SB60150F 3/0
4	1,4	10	SB60150F 4/0
5	1,4	10	SB60150F 5/0
6	1,4	10	SB60150F 6/0
8	1,4	5	SB60150F 8/0
10	1,4	5	SB60150F 10/0
15	1,4	5	SB60150F 15/0





## Food Grade rubber sheets

### Pegasus NBR

<b>Quality:</b>	NBR
<b>Colour:</b>	Off white
<b>Temperature range:</b>	-35° to +100°C
<b>Specific gravity:</b>	1,40
<b>Hardness:</b>	60 Shore A +/- 5
<b>Tensile strength:</b>	6 Mpa
<b>Elongation at break:</b>	350%

**Features:** A white, odourless and tasteless NBR rubber, resistant to natural oils and grease. Food quality according to FDA and EC1935/2004.

**Application:** Food industry.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	20	NB60140F 1/0
2	0	-	1,4	10	NB60140F 2/0
3	0/1	cotton	1,4	10	NB60140F 3/0
4	0/1	cotton	1,4	10	NB60140F 4/0
5	0	-	1,4	10	NB60140F 5/0
6	0	-	1,4	10	NB60140F 6/0
8	0	-	1,4	5	NB60140F 8/0
10	0	-	1,4	5	NB60140F 10/0







## Food Grade rubber sheets

### Pegasus EPDM

**Quality:** EPDM  
**Colour:** Off white  
**Temperature range:** -25 to +140°C  
**Specific gravity:** 1,30  
**Hardness:** 60 Shore A +/- 5  
**Tensile strength:** 5 Mpa  
**Elongation at break:** 300%

**Features:** A white, odourless and tasteless EPDM rubber with a high temperature range. Food quality according to FDA and EC1935/2004.

**Application:** Food industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	EP60130F 1/0
2	1,4	10	EP60130F 2/0
3	1,4	10	EP60130F 3/0
4	1,4	10	EP60130F 4/0
5	1,4	10	EP60130F 5/0
6	1,4	10	EP60130F 6/0
8	1,4	5	EP60130F 8/0
10	1,4	5	EP60130F 10/0





## Food Grade rubber sheets

### Pegasus CR

<b>Quality:</b>	CR
<b>Colour:</b>	Off white
<b>Temperature range:</b>	-35° to +120°C
<b>Specific gravity:</b>	1,45
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	5 Mpa
<b>Elongation at break:</b>	250%

**Features:** A white, odourless and tasteless CR rubber according to FDA.

**Application:** Food industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	NE65145F 1/0
2	1,4	10	NE65145F 2/0
3	1,4	10	NE65145F 3/0
5	1,4	10	NE65145F 5/0





## Food Grade rubber sheets

### Viking

**Quality:** Silicone  
**Temperature range:** -90° to +230°C  
**Specific gravity:** 1,20  
**Hardness:** 60 Shore A +/- 5  
**Tensile strength:** 6 Mpa  
**Elongation at break:** 200%

**Features:** Excellent silicone quality with resistance to extreme temperatures. Food quality according to FDA and EC1935/2004.

**Application:** Food industry, building industry, freezers, boilers, railway industry et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Colour	Article nr.
1	1,2	10	Transparent, Red, Blue	SI60120F 1/0
1,5	1,2	10	Transparent, Red, Blue	SI60120F 1,5/0
2	1,2	10	Transparent, Red, Blue, White	SI60120F 2/0
3	1,2	10	Transparent, Red, Blue, White	SI60120F3/0
4	1,2	10	Transparent, Red, Blue	SI60120F 4/0
5	1,2	10	Transparent, Red, Blue, White	SI60120F 5/0
6	1,2	10	Transparent, Red, Blue	SI60120F 6/0
8	1,2	5	Transparent, Red, Blue	SI60120F 8/0
10	1,2	5	Transparent, Red, Blue, White	SI60120F 10/0





## Food Grade rubber sheets

### Viking 40

<b>Quality:</b>	Silicone
<b>Colour:</b>	Transparent
<b>Temperature range:</b>	-90° to +230°C
<b>Specific gravity:</b>	1,20
<b>Hardness:</b>	40 Shore A +/- 5
<b>Tensile strength:</b>	6 Mpa
<b>Elongation at break:</b>	200%

**Features:** Excellent silicone quality with resistance to extreme temperatures. Food quality according to FDA and EC1935/2004.

**Application:** Food industry, building industry, freezers, boilers, railway industry et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,2	10	SI40120F 2/0
3	1,2	10	SI40120F 3/0
4	1,2	10	SI40120F 4/0

# FKM rubber sheets

*FKM is used for the most demanding industrial applications. It has a good resistance to hydrocarbons, acids, alkalis, oxidants and oils. Its mechanical properties remain intact at temperatures of up to 250°C.*


**G**

Quality rubber solutions.





Rubber Europe

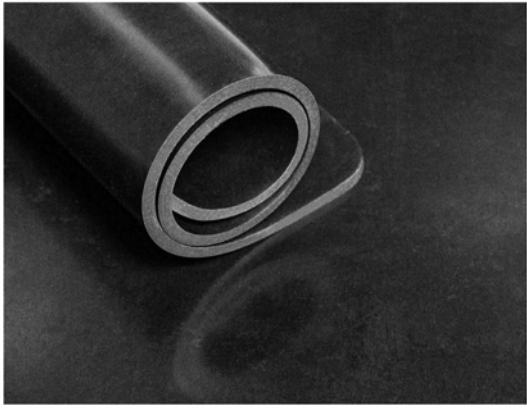

## FKM rubber sheets

### Karibu FKM A

<b>Quality:</b>	FKM
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +250° C
<b>Specific gravity:</b>	1,95 grs/cm <sup>3</sup>
<b>Hardness:</b>	72 Shore A +/- 5
<b>Tensile strength:</b>	5 Mpa
<b>Elongation at break:</b>	200%

**Features:** Excellent resistance to oxygen, ozone and natural weathering and also outstanding resistance to compression, especially at elevated temperatures. Its resistance to most solvents and chemicals give long service life as it has excellent resistance against hydrocarbons, aliphatic, aromatic and chlorinated chemicals and resistance to acids and alkalis including oxidants.

**Application:** Gaskets in extreme circumstances.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,2	10	FPG72190G 1/0
1,5	1,2	10	FPG72190G 1,5/0
2	1,2	10	FPG72190G 2/0
3	1,2	10	FPG72190G 3/0
4	1,2	10	FPG72190G 4/0
5	1,2	10	FPG72190G 5/0
6	1,2	10	FPG72190G 6/0
8	1,2	5	FPG72190G 8/0
10	1,2	5	FPG72190G 10/0
12	1,2	5	FPG72190G 12/0









**Various**

**H**

Quality rubber solutions.

---



Rubber Europe





## Various Kabira Neobenzid

<b>Quality:</b>	NBR/PVC
<b>Colour:</b>	Green
<b>Temperature range:</b>	-25° to +100° C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	6,5 Mpa
<b>Elongation at break:</b>	350%

**Features:** Good resistance to oils and good mechanical properties, no permeability of gases, moderate aging properties.

**Application:** Petrochemical industries, garages, workshops et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	NB65145G 2/0
3	1,4	10	NB65145G 3/0
4	1,4	10	NB65145G 4/0
5	1,4	10	NB65145G 5/0
6	1,4	10	NB65145G 6/0
8	1,4	5	NB65145G 8/0
10	1,4	5	NB65145G 10/0




## Various Serra CSM

<b>Quality:</b>	CSM
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +140 C
<b>Specific gravity:</b>	1,40 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	10 Mpa
<b>Elongation at break:</b>	350%

**Features:** CSM rubber is very resistant to oxygen and ozone and shows excellent weathering resistance.

**Application:** Excellent abrasion resistant and good flame resistant properties.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	HN65140 2/0
3	1,4	10	HN65140 3/0
4	1,4	10	HN65140 4/0
5	1,4	10	HN65140 5/0
6	1,4	10	HN65140 6/0

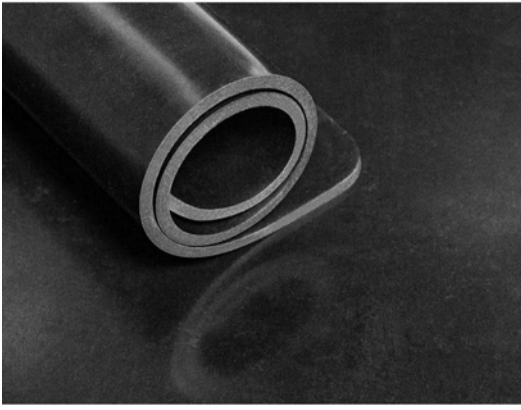

## Various Rama Butyl

<b>Quality:</b>	IR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-40° to +125° C
<b>Specific gravity:</b>	1,20 grs/cm <sup>3</sup>
<b>Hardness:</b>	60 Shore A +/- 5
<b>Tensile strength:</b>	9 Mpa
<b>Elongation at break:</b>	350%

**Features:** Butyl rubber quality with a very low permeability to air and other gases, excellent resistance to ozone, oxidation and sunlight and an excellent temperature range.

**Application:** Gaskets, vibration damping and shock absorption applications.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	IR60120 2/0
3	1,4	10	IR60120 3/0
4	1,4	10	IR60120 4/0
5	1,4	10	IR60120 5/0

# Rubber matting



Quality rubber solutions.

---



Rubber Europe



## Rubber matting

### Cobra

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,5 grs/cm <sup>3</sup>
<b>Hardness:</b>	70 Shore A +/- 5
<b>Tensile strength:</b>	3 Mpa
<b>Elongation at break:</b>	200%

**Features:** Excellent anti-slip floor mat available in 2 meter width.

**Application:** Car trunks, horse trailers, entrances et cetera.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
3	0	-	1,7/1,8/2	10	SX70150C 3/0
4	2	nylon	2	10	SX70150C 4/2
5	0	-	2	10	SX70150C 5/0
6	2	nylon	1,7/2	10/12	SX70150C 6/2
8	1	nylon	1,7/2	10/12	SX70150C 8/1



## Rubber matting

### Feniks Insulation Mat

<b>Quality:</b>	EPDM/SBR
<b>Temperature range:</b>	-25° to +120°C
<b>Specific gravity:</b>	1,5 grs/cm <sup>3</sup>
<b>Hardness:</b>	70 Shore A +/- 5
<b>Tensile strength:</b>	5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** Strong and abrasion resistant. Fine ribbed design on one side and a fine cloth impression pattern on the other side. Electrically insulating according to the standard IEC CEI 61111.

**Application:** Switchboard flooring to prevent against electrical shocks.

Class	Colour	Thickness (mm)	Proof Test Voltage	Resistance	Maximum use voltage	Width (mtr)	Length (mtr)	Article Nr.
2	Grey, Black	3	20 kV	30 kV	17 kV	1/1,2	10	ELS30000 3/0
4	Grey	4,5	40 kV	50 kV	36 kV	1/1,2	10	ELS50000 4,5/0





## Rubber matting

### Saturn Fine Rib

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black, Grey
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.

**Application:** Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Colour	Article nr.
3	0/1	cotton	1/1,2	10	Black	MR65 3/0
3	0	-	1/1,2/1,4	10	Grey	MR65G 3/0
4	0	-	1	10	Black	MR65 4/0



## Rubber matting

### Saturn Basic Fine Rib

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.

**Application:** Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Quality	Article nr.
2,7	0,2/0,3/0,4/0,5/0,6 0,7/1/1,2/1,4	10	NR/SBR	MR65SX 2,7/0
2,7	1/1,2	10	NBR/SBR	MR65NBR 2,7/0



## Rubber matting

### Saturn Eco Fine Rib

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.

**Application:** Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2,5	1/1,2	10	MN65 2,5/0



## Rubber matting

### Athena Broad Rib

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.

**Application:** Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1/1,2/1,4/1,6	10	CR65 3/0



## Rubber matting

### Freya Block Rib

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.

**Application:** Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,2	10	LS65 3/0



## Rubber matting

### Hurricane Wide Rib

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** Excellent non-slip surface for optimum safety on one side and a fine cloth impression pattern on the other side. Abrasion resistance helps to prevent accidents in all weather conditions.

**Application:** This multipurpose mat is ideal for both wet & dry areas. It is easy to clean with little maintenance.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
5	1/1,2	10	BR65 5/0
6	1/1,2	10	BR65 6/0



## Rubber matting

### Hurricane Eco Wide Rib

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,5 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3 Mpa
<b>Elongation at break:</b>	200%

**Features:** Excellent non-slip surface for optimum safety on one side and a fine cloth impression pattern on the other side. Abrasion resistance helps to prevent accidents in all weather conditions.

**Application:** This multipurpose mat is ideal for both wet & dry areas. It is easy to clean with little maintenance.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
5	1/1,2	10	BR65SX 5/0
6	1/1,2	10	BR65SX 6/0



## Rubber matting

### Hector Truck Rib

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** Deep rib design surface on one side and a fine cloth impression pattern on the other side.

**Application:** A non skid grip that helps to keep cargo in place and prevent damage to the truck beds from sliding cargo.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
4,5	2	10	TL65 4,5/0
6	2	10	TL65 6/0



## Rubber matting

### Vidar Coin Mat

<b>Quality:</b>	NR/SBR
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,6 grs/cm <sup>3</sup>
<b>Hardness:</b>	80 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	500 mm <sup>3</sup>

**Features:** Raised circular design surface on one side and a fine cloth impression pattern on the other side.

**Application:** Indoor application such as airports, hotels, cabins, exhibitions et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Colour	Article nr.
3	1/1,2	10	Black, Grey, Dark Blue, Brown	CS80 3/0
4,5	1/1,2	10	Black	CS80 4,5/0



## Rubber matting

### Sphinx Pyramid Mat


<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black, Grey
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** A high relief pyramide design on one side and a fine cloth impression pattern on the other side.

**Application:** Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,2	10	SD65 3/0



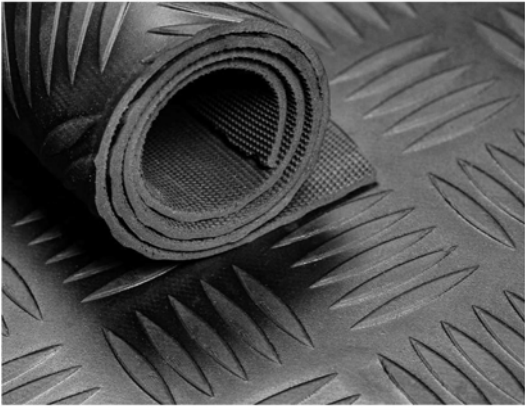

## Rubber matting


### Odin Checker Mat

<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** Continuous checkered field design surface on one side and a fine cloth impression pattern on the other side.

**Application:** Car trunks, horse trailers, entrances et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Quality	Colour	Article nr.
3	1/1,2/1,4/1,5/1,6	10	NR/SBR	Black	CD65 3/0
3	1,4	10	NR/SBR	Grey	CD65G 3/0
3	1,4	10	NBR/SBR	Black	CD65NBR 3/0
5	1,4	10	NR/SBR	Black	CD65 5/0

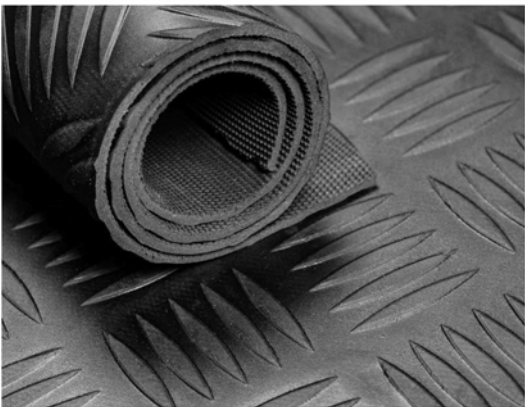

## Rubber matting

### Odin Eco Checker Mat

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,5 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3 Mpa
<b>Elongation at break:</b>	200%

**Features:** Continuous checkered field design on one side and a fine cloth impression pattern on the other side.

**Application:** Car trunks, horse trailers, entrances et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1/1,2/1,4/1,5/1,6	10	CD65SX 3/0





## Rubber matting

### Seltos Diamond Checker

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** Floormat with continuous tear field design on one side and a fine cloth impression pattern on the other side. Available up to 2,2 meter width.

**Application:** Car trunks, horse trailers, entrances et cetera.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
3	0	-	1,5/1,8/2/2,2	10	DCD65 3/0
5	0	-	2	10	DCD65 5/0
6	2	nylon	2	10	DCD65 6/2
8	1	nylon	2	10	DCD65 8/1



## Rubber matting


### Amoeba Mat

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** Anti-slip surface on one side and a fine cloth impression pattern on the other side.

**Application:** Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,5	10	AM65 3/0

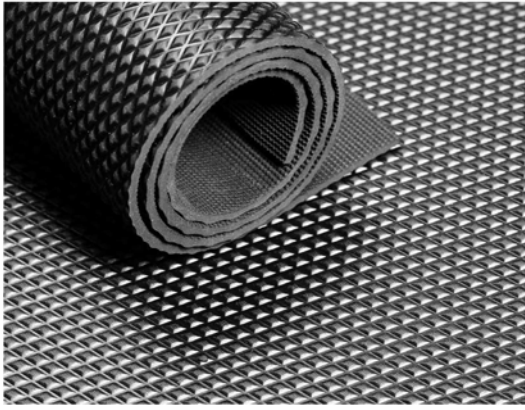

## Rubber matting


### Zenith Diamond Mat

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black, Grey
<b>Temperature range:</b>	-30° to +70°C
<b>Specific gravity:</b>	1,45 grs/cm <sup>3</sup>
<b>Hardness:</b>	65 Shore A +/- 5
<b>Tensile strength:</b>	3,5 Mpa
<b>Elongation at break:</b>	250%
<b>Abrasion:</b>	300 mm <sup>3</sup>

**Features:** A high relief diamond design surface on one side and a fine cloth impression pattern on the other side.

**Application:** Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,2	10	DD65 3/0

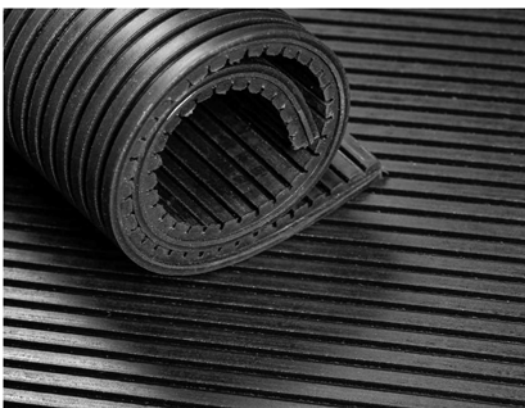

## Rubber matting

### Novibramat

<b>Quality:</b>	NR/SBR
<b>Colour:</b>	Black
<b>Temperature range:</b>	-20° to +80°C
<b>Specific gravity:</b>	1,2 grs/cm <sup>3</sup>
<b>Tensile strength:</b>	5 Mpa
<b>Elongation at break:</b>	300%
<b>Max load:</b>	8 kg/cm <sup>2</sup>

**Features:** Anti-vibration rubber mat with rib design in 90 degrees angle.

**Application:** To prevent machines from vibrating and reduce noise.

Hardness (Shore A +/- 5)	Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
45	8/10	0,5	0,5	AV45 0,5
45	8/10	1	1	AV45 1
70	8/10	0,5	0,5	AV70 0,5
70	8/10	1	1	AV70 1



Zenith Rubber Europe  
Utrechtsestraatweg 230  
3911 TX Rhenen  
The Netherlands

T +31 (0)88 618 93 40  
F +31 (0)88 618 93 97  
info@zenitheurope.com  
www.zenitheurope.com

Discover rubber solutions on [ZenithEurope.com](http://ZenithEurope.com)

---